



WHERE LIGHT MEETS PRECISION



with a variety of solutions to perform the right
lighting functions for different tasks, choose from
a range of modules featuring the latest advances
in light definition


zndlighting.com

החל
L I G H T I N G

— systems



Micro



Edge



Lite



Luma




Muse

— recessed




Blaze R



Flo



Radi



Aura



Rise R



Loom R



Pure



Shift



Evo R



Vibe R



Navi R



Flick R



Savy R

— recessed trimless



Blaze RT



Evo RT



Vibe RT



Navi RT



Flick RT

— surface



Glint



Fable



Glid



Flick S



Savy S



Flux



Twine

— tracks



Blaze T



Flick T

— linear



Nap

— round



Lyro



Orbi

— led strips



Strip 5



Strip 10



Strip IP

— drivers



Driver for 24V



Driver for 48V



Driver for 48V

— magnetic system Micro

TRACK



Micro TR



Micro TR Arc



Micro SR




Micro SR Arc

SPOT



Pot



Top

SPOT LENSES



Point 12



Point 20

OPAL LINE



Flat



Sleek



Sleek Arc

OPAL



Punk

SUSPENDED



Drop Tube



Drop Conic

— magnetic system Edge

TRACK



Edge SR



Edge TR



Edge TRW

SPOT



Shine 7



Shine 12



Shine 18

SPOT ZOOM



Shine Zoom 8



Shine Zoom 12

SPOT



Shine Plant



Shine Art

ANTI-GLARE SPOT



Ori

SPOT LENSES



Cube Lenses 6



Cube Lenses 12

SPOT OPAL



Cube Line 6



Cube Line 12

LENSES



Dotty 6



Dotty 12



Dotty 18



Cube


OPAL LINE



Row 15



Row 20



Row 30

— magnetic system Lite

TRACK



Lite SR

SPOT



Spark 9



Spark 18



Mod



Beam

SPOT LENSES



Nexa 6



Nexa 18



Nexa 30



Stella

OPAL LINE



Geo 10



Geo 20

OPAL



Halo



Pico

SUSPENDED



Halo Wire



Wisp



Echo

— magnetic system Luma

TRACK



Luma

SPOT



Zest



Quik

SPOT LENSES



Eys

OPAL LINE



Flare

OPAL



Zen

OPAL BALL



Glow



Glow Wire

TRANSPARENT



Frost



Trill

— magnetic system Muse

TRACK



Muse

SPOT



Axis



Verta

SPOT LENSES



Arcus



Quadra

OPAL LINE



Lineo

OPAL




Glorio



— **systems**

Micro

trimless system

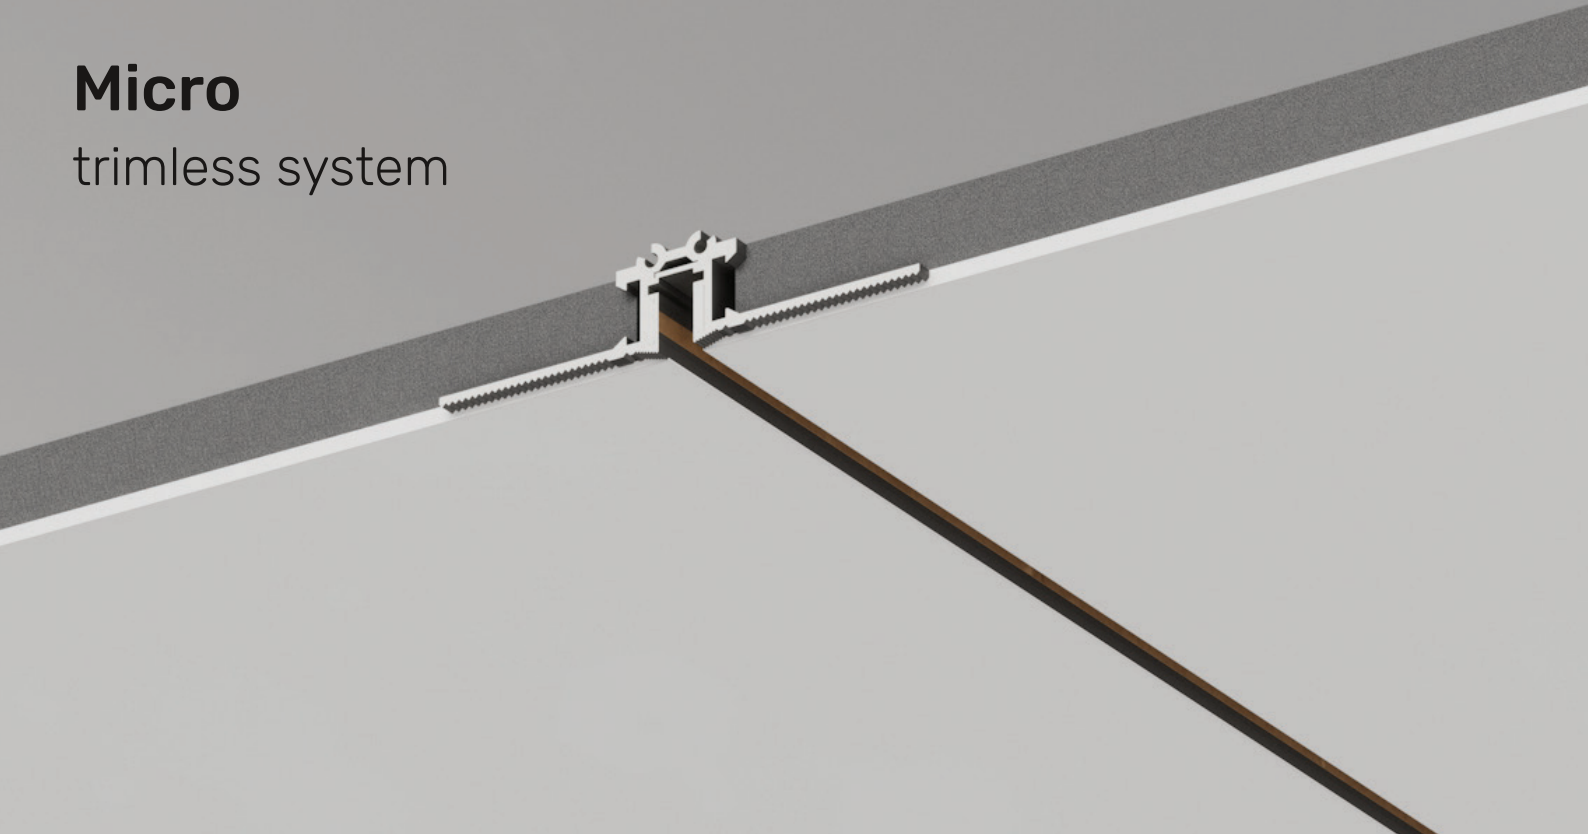

Quickinfo

GENERAL

recessed trimless

IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium

spray powder

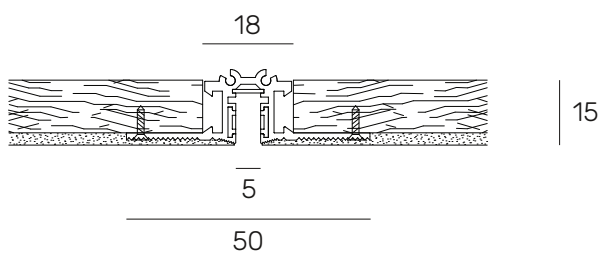

Pot



Top



Point



Sleek



Sleek Arc




Punk




Drop Tube




Drop Conic



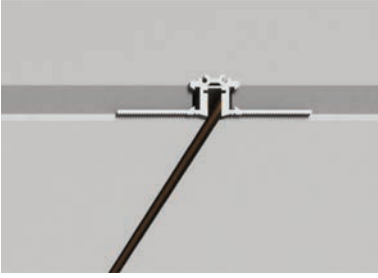

Micro trimless track

order installation track, light insets + mounting accessories separately




INSTALLATION TRACK

track trimless 2000mm 24V | black

ORDER CODE


Z1000-24.TR.200.BK



horizontal corner trimless 90° | black

ORDER CODE

Z1000-24.TR.HC.BK



vertical corner trimless 90° | black

ORDER CODE

Z1000-24.TR.VC.BK



mounting connection for trimless track Micro (set 2.pcs)


ORDER CODE

Z1000-24.TR.MC



end cap for trimless track Micro | black

Z1000-24.EC.BK



POWER FEEDER ELECTRICAL

power feeder for 24V for track Micro | black

ORDER CODE

Z1000-24.PF.BK



CONNECTOR ELECTRICAL

straight connector for 24V for track Micro | black


ORDER CODE

Z1000-24.SC.BK



corner connector for 24V for track Micro | black

Z1000-24.CC.BK



LED DRIVER

led driver 24V 100W for installing on track Micro | black

ORDER CODE

Z1000-24.DR.100.BK

remote drivers on driver page XXX

Micro

trimless system
arcs



Quickinfo

GENERAL

recessed trimless

IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium

spray powder

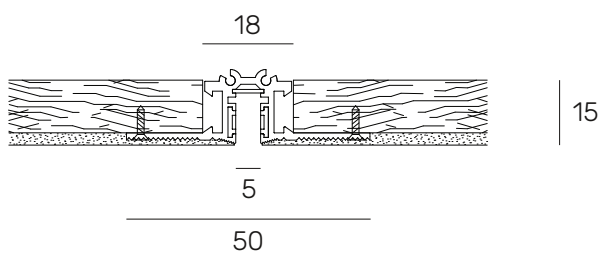


24V



Micro trimless arcs track

order installation track, light insets + mounting accessories separately

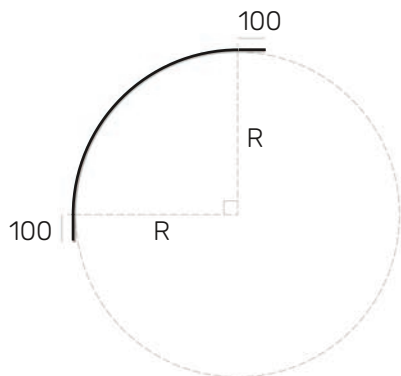

INSTALLATION TRACK - ARCS

R (mm)

R150

R300

R450

R600

arc trimless | black

arc trimless | black

arc trimless | black

arc trimless | black

ORDER CODE

Z1000-24.TR.R150.BK

Z1000-24.TR.R300.BK

Z1000-24.TR.R450.BK

Z1000-24.TR.R600.BK

Micro

surface system



Quickinfo

GENERAL

surface

 IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium


 spray powder

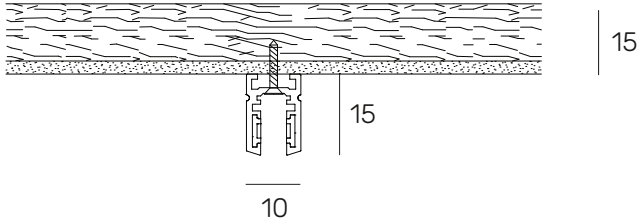

Pot




Top



Point



Sleek



Sleek Arc



Punk



Drop Tube



Drop Conic





Micro surface track

order installation track, light insets + mounting accessories separately




INSTALLATION TRACK

track surface 2000mm 24V | black

ORDER CODE


Z1000-24.SR.200.BK



horizontal corner surface 90° | black

ORDER CODE

Z1000-24.SR.HC.BK



vertical corner surface 90° | black

ORDER CODE

Z1000-24.SR.VC.BK



mounting connection for surface track Micro


ORDER CODE

Z1000-24.SR.MC



end cap for surface track Micro | black

Z1000-24.EC.BK



POWER FEEDER ELECTRICAL

power feeder for 24V for track Micro | black

ORDER CODE

Z1000-24.PF.BK



CONNECTOR ELECTRICAL

straight connector for 24V for track Micro | black


ORDER CODE

Z1000-24.SC.BK



corner connector for 24V for track Micro | black

Z1000-24.CC.BK



LED DRIVER

led driver 24V 100W for installing on track Micro | black

ORDER CODE

Z1000-24.DR.100.BK

remote drivers on driver page XXX

Micro

surface system
arcs



Quickinfo

GENERAL

surface

IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium

spray powder

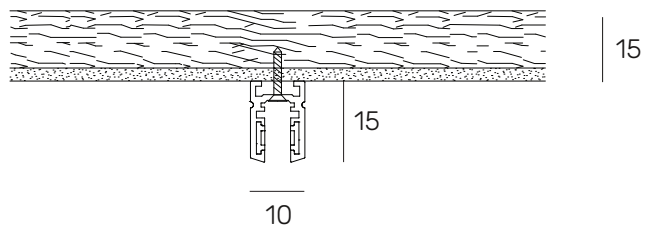


24V



Micro surface arcs track

order installation track, light insets + mounting accessories separately

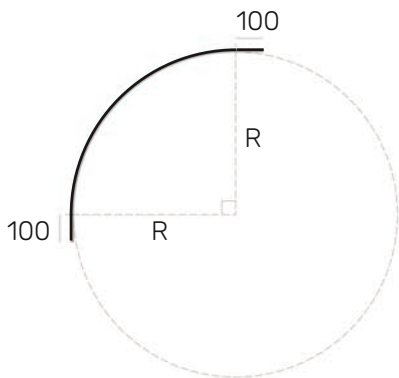

INSTALLATION TRACK - ARCS

R (mm)

R150

R300

R450

R600

arc surface | black

arc surface | black

arc surface | black

arc surface | black



ORDER CODE

Z1000-24.SR.R150.BK

Z1000-24.SR.R300.BK

Z1000-24.SR.R450.BK


Z1000-24.SR.R600.BK

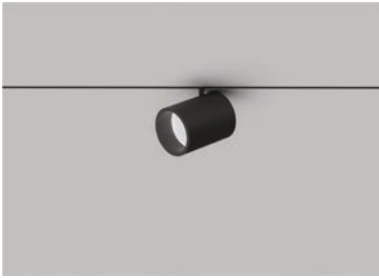

Pot

Z1015-9.36.**|1|.2|.3|**

Power	9W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	530lm
Color rendering index	CRI>90



Top

Z1020-5.36.**|1|.2|.3|**

Power	5W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	355lm
Color rendering index	CRI>90



OPTIONS



Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	*White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM optional	D



* On request



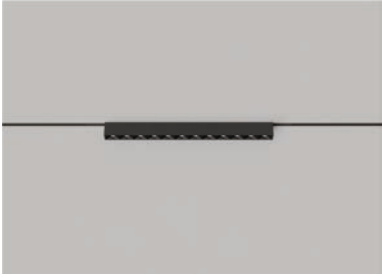

Point 12 Z1030-12.30.1|.BK.3|

Power	12W
Beam angle	30°
Color temperature	2700K/3000K/4000K
Light efficiency	430lm
Color rendering index	CRI>90

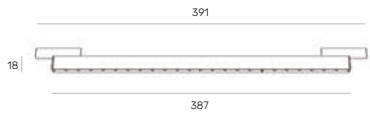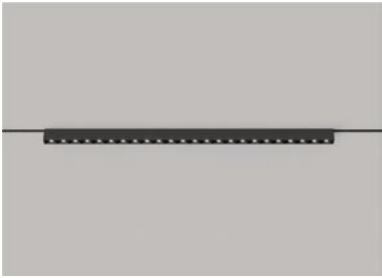

Point 20 Z1030-20.30.1|.BK.3|

Power	20W
Beam angle	30°
Color temperature	2700K/3000K/4000K
Light efficiency	1065lm
Color rendering index	CRI>90

OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Dim options		
3	Non-DIM	
3	*DIM optional	D

* On request





Flat

Z1040-16.OP|1|.BK.|3|


Power	16W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	720lm
Color rendering index	CRI>90



Sleek

Z1045-10.OP|1|.BK.|3|

Power	10W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	715lm
Color rendering index	CRI>90



Sleek Arc

Z1048-8.OP|1|.BK.|3|

Power	8W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	170lm
Color rendering index	CRI>90




OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Dim options		
3	Non-DIM	
3	*DIM optional	D

* On request





Punk

Z1022-18.OP.|1|.2|.3|

Power	18W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	940lm
Color rendering index	CRI>90



OPTIONS


Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black	BK
2	*White	WH

Dim options		
3	Non-DIM	
3	*DIM optional	D

* On request





Drop Tube

Z1060-3.24.|1|.2|.3|

Power	3W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	100lm
Color rendering index	CRI>90



Drop Conic

Z1062-3.24.|1|.2|.3|

Power	3W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	70lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black	BK
2	*White	WH


Dim options		
3	Non-DIM	
3	*DIM optional	D

* On request



Edge

surface/suspended
system

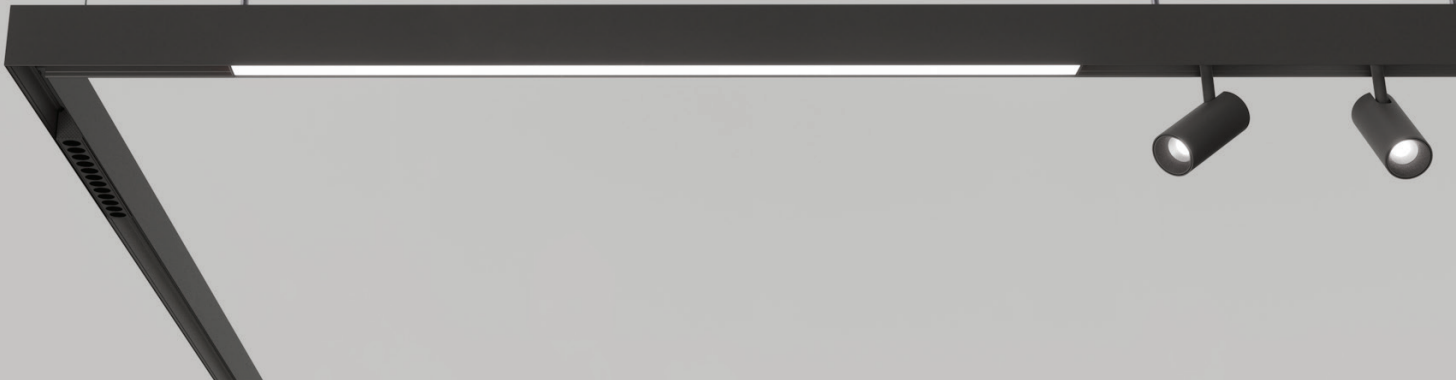

Quickinfo

GENERAL

surface/suspended

IP 20


ELECTRICAL

NON DIM, DIM-TRIAC, DIM-DALI

PHYSICAL

aluminium

spray powder

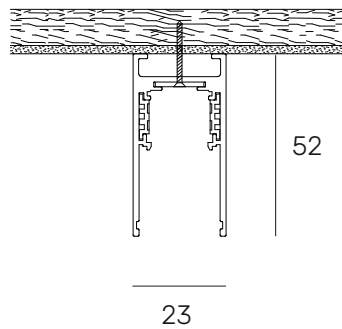

Shine



Shine Zoom



Shine Plant



Shine Art



Ori



Cube Lenses



Dotty



Cube




Cube Line



Row



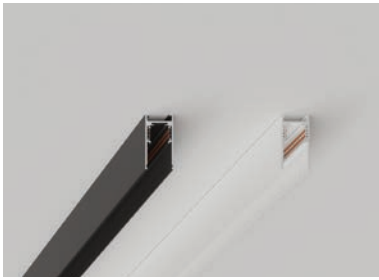

Edge surface/suspended

order installation track, light insets + mounting accessories separately




INSTALLATION TRACK

track surface/suspended 2000mm 48V

ORDER CODE

Z2000-48.SR.200.|2|


*end cup included



horizontal corner surface/suspended 90°

ORDER CODE

Z2000-48.SR.HC.|2|



vertical corner surface/suspended 90°

ORDER CODE

Z2000-48.SR.VC.|2|



connector plate for surface/suspended track Edge

ORDER CODE

Z2000-48.CP

POWER FEEDER / CONNECTOR ELECTRICAL



power feeder electrical for 48V for track Edge


ORDER CODE

Z2000-48.PF.|2|



straight connector electrical for 48V for track Edge

Z2000-48.SC.|2|



corner connector electrical for 48V for track Edge

Z2000-48.CC.|2|

LED DRIVER *optional dimmable for TRIAC and DALI



led driver 48V 100W for installing on track Edge, non-dim

ORDER CODE

Z2000-48.DR.100.|2|



led driver 48V 200W for installing on track Edge, non-dim

Z2000-48.DR.200.|2|

remote drivers on driver page XXX

canopy recessed



canopy surface



SUSPENSION SET / CANOPY

suspension set 1.pcs for track Edge, L2000mm

ORDER CODE

Z2000-48.SUSP.200

suspension set 1.pcs for track Edge, L2000mm | black

Z2000-48.SUSP.200.BK

suspension set 1.pcs for track Edge, L5000mm | black

Z2000-48.SUSP.500.BK

ceiling cup/canopy surface for el.cable

Z2000-48.CCUP.|2|

recessed cup/canopy recessed for el.cable

Z2000-48.RCUP.|2|


OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Edge

trimless system

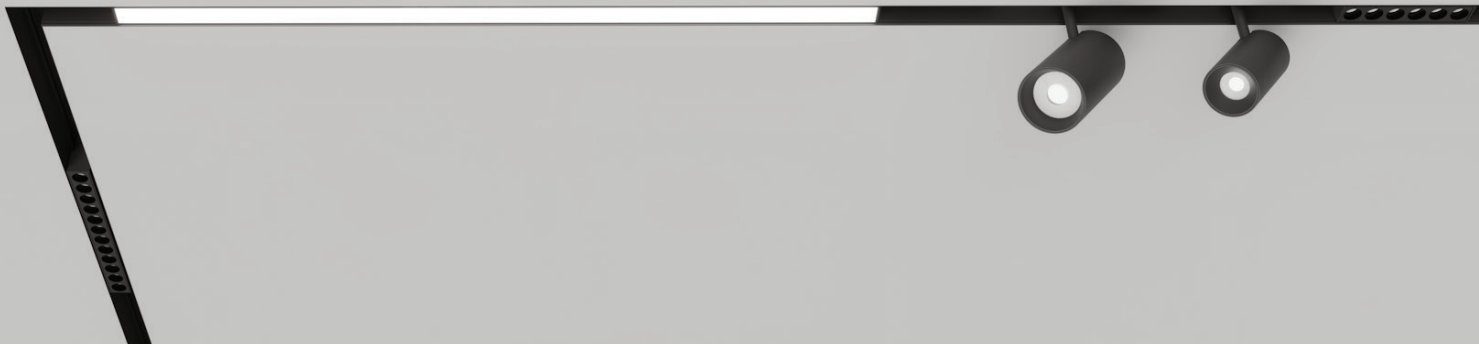

Quickinfo

GENERAL

recessed trimless

IP 20


ELECTRICAL

NON DIM, DIM-TRIAC, DIM-DALI

PHYSICAL

aluminium

spray powder

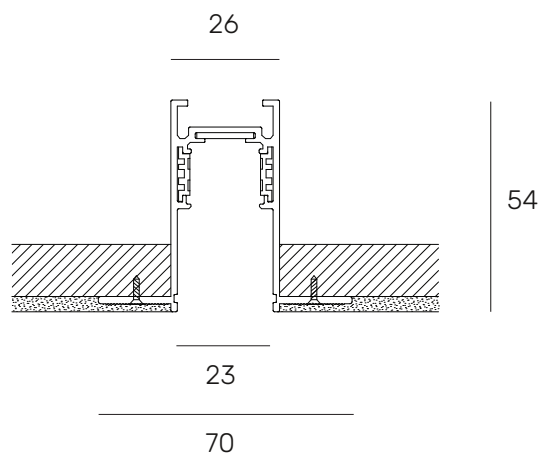

Shine



Shine Zoom



Shine Plant



Shine Art



Ori



Cube Lenses



Dotty



Cube




Cube Line




Row



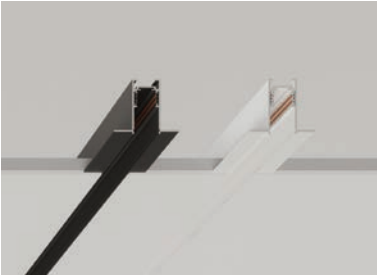

Edge recessed trimless

order installation track, light insets + mounting accessories separately



INSTALLATION TRACK

track trimless 2000mm 48V

*end cup included

ORDER CODE


Z2000-48.TR.200. | 2 |



horizontal corner trimless 90°

ORDER CODE

Z2000-48.TR.HC. | 2 |



vertical corner trimless 90°

ORDER CODE

Z2000-48.TR.VC. | 2 |



connector plate for surface/suspended track Egde

ORDER CODE

Z2000-48.CP

POWER FEEDER / CONNECTOR ELECTRICAL



power feeder electrical for 48V for track Egde


ORDER CODE

Z2000-48.PF. | 2 |



straight connector electrical for 48V for track Egde

Z2000-48.SC. | 2 |



corner connector electrical for 48V for track Egde

Z2000-48.CC. | 2 |

LED DRIVER *optional dimmable for TRIAC and DALI



led driver 48V 100W for installing on track Egde

ORDER CODE

Z2000-48.DR.100. | 2 |



led driver 48V 200W for installing on track Egde

Z2000-48.DR.200. | 2 |

remote drivers on driver page XXX

OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Edge

trimless system W



Quickinfo

GENERAL

recessed trimless

IP 20


ELECTRICAL

NON DIM, DIM-TRIAC, DIM-DALI

PHYSICAL

aluminium

spray powder

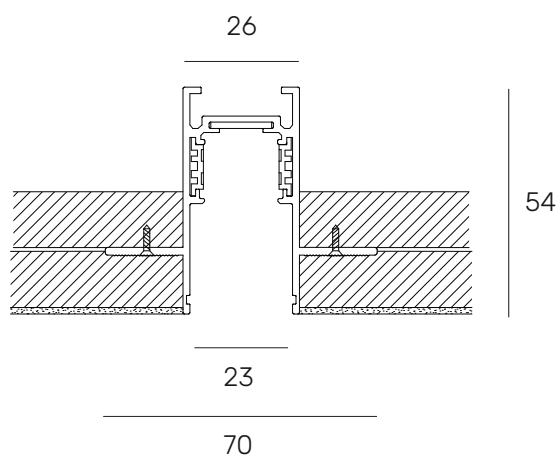

Shine



Shine Zoom



Shine Plant



Shine Art



Ori



Cube Lenses



Dotty



Cube




Cube Line




Row



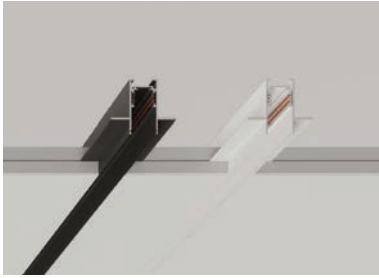

Edge recessed trimless W

order installation track, light insets + mounting accessories separately




INSTALLATION TRACK

track trimless W 2000mm 48V

*end cup included

ORDER CODE


Z2000-48.TRW.200.|2|



horizontal corner trimless 90°

ORDER CODE

Z2000-48.TRW.HC.|2|



vertical corner trimless 90°

ORDER CODE

Z2000-48.TRW.VC.|2|



connector plate for surface/suspended track Edge

ORDER CODE

Z2000-48.CP

POWER FEEDER / CONNECTOR ELECTRICAL



power feeder electrical for 48V for track Edge


ORDER CODE

Z2000-48.PF.|2|



straight connector electrical for 48V for track Edge


Z2000-48.SC.|2|



corner connector electrical for 48V for track Edge

Z2000-48.CC.|2|


LED DRIVER *optional dimmable for TRIAC and DALI



led driver 48V 100W for installing on track Edge

ORDER CODE

Z2000-48.DR.100.|2|



led driver 48V 200W for installing on track Edge



Z2000-48.DR.200.|2|

remote drivers on driver page XXX

OPTIONS

Colour


2	Black	■	BK
2	White	□	WH

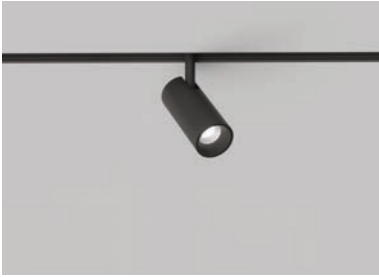

Shine 7

Z2936-7.36.**|1|**.**|2|**.**|3|**


Power	5W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	400lm
Color rendering index	CRI>90



Shine 12

Z2936-12.36.**|1|**.**|2|**.**|3|**

Power	10W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	800lm
Color rendering index	CRI>90



Shine 18

Z2936-18.36.**|1|**.**|2|**.**|3|**

Power	15W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	1200lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40


Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request




48V



Shine Zoom 8 Z2939-8.15-60.**|1|.2|.3|**

Power	8W
Beam angle	15°-60°
Color temperature	2700K/3000K/4000K
Light efficiency	640lm
Color rendering index	CRI>90



Shine Zoom 12 Z2939-12.10-55.**|1|.2|.3|**

Power	12W
Beam angle	10°-55°
Color temperature	2700K/3000K/4000K
Light efficiency	960lm
Color rendering index	CRI>90



manual zoom for light beam


OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request

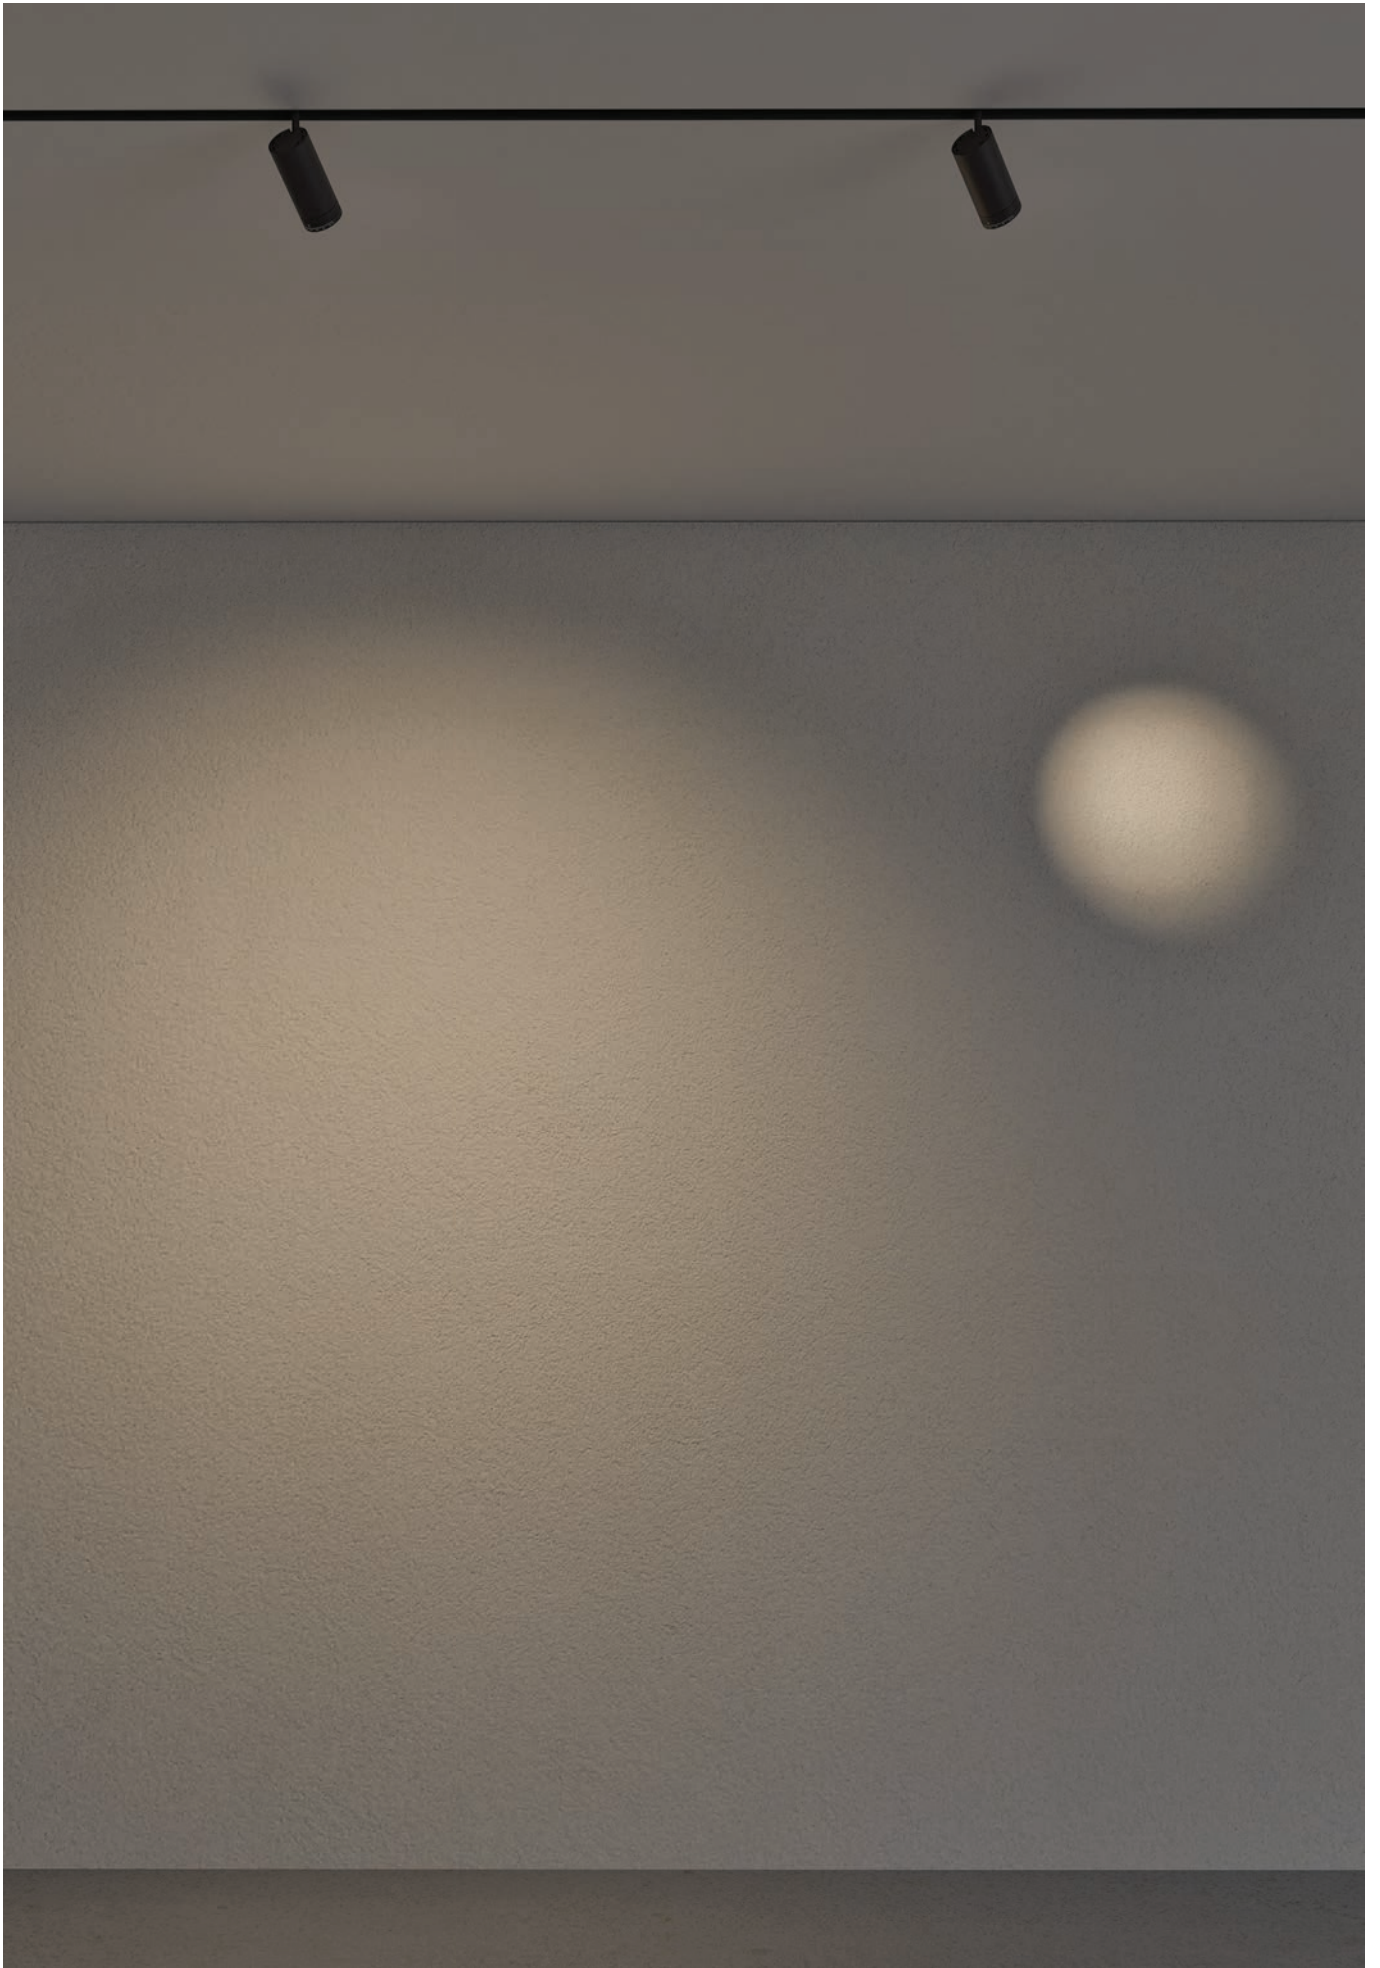


48V



Shine Plant

Z2939-8.15-60.PL.|2|.3|

Power	8W
Beam angle	15°-60°
Color temperature	Fito
Light efficiency	640lm
Color rendering index	CRI>90

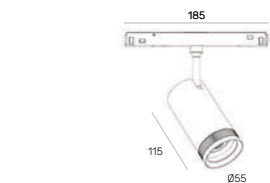

manual zoom for light beam

OPTIONS


Colour		
2	Black	BK
2	White	WH

Dim options		
3	Non-DIM	
3	*DIM - TRIAC	T
3	*DIM - DALI	D

* On request



48V



Shine Art

Z2944-8.20-35.**|1|**.**|2|**.**|3|**

Power	8W
Beam angle	20°-35°
Color temperature	2700K/3000K/4000K
Light efficiency	640lm
Color rendering index	CRI>90

CE
RoHS
III
IP20
48V
HOT PLUG SAFE
FLICKER FREE
ROTATION


OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40


Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request

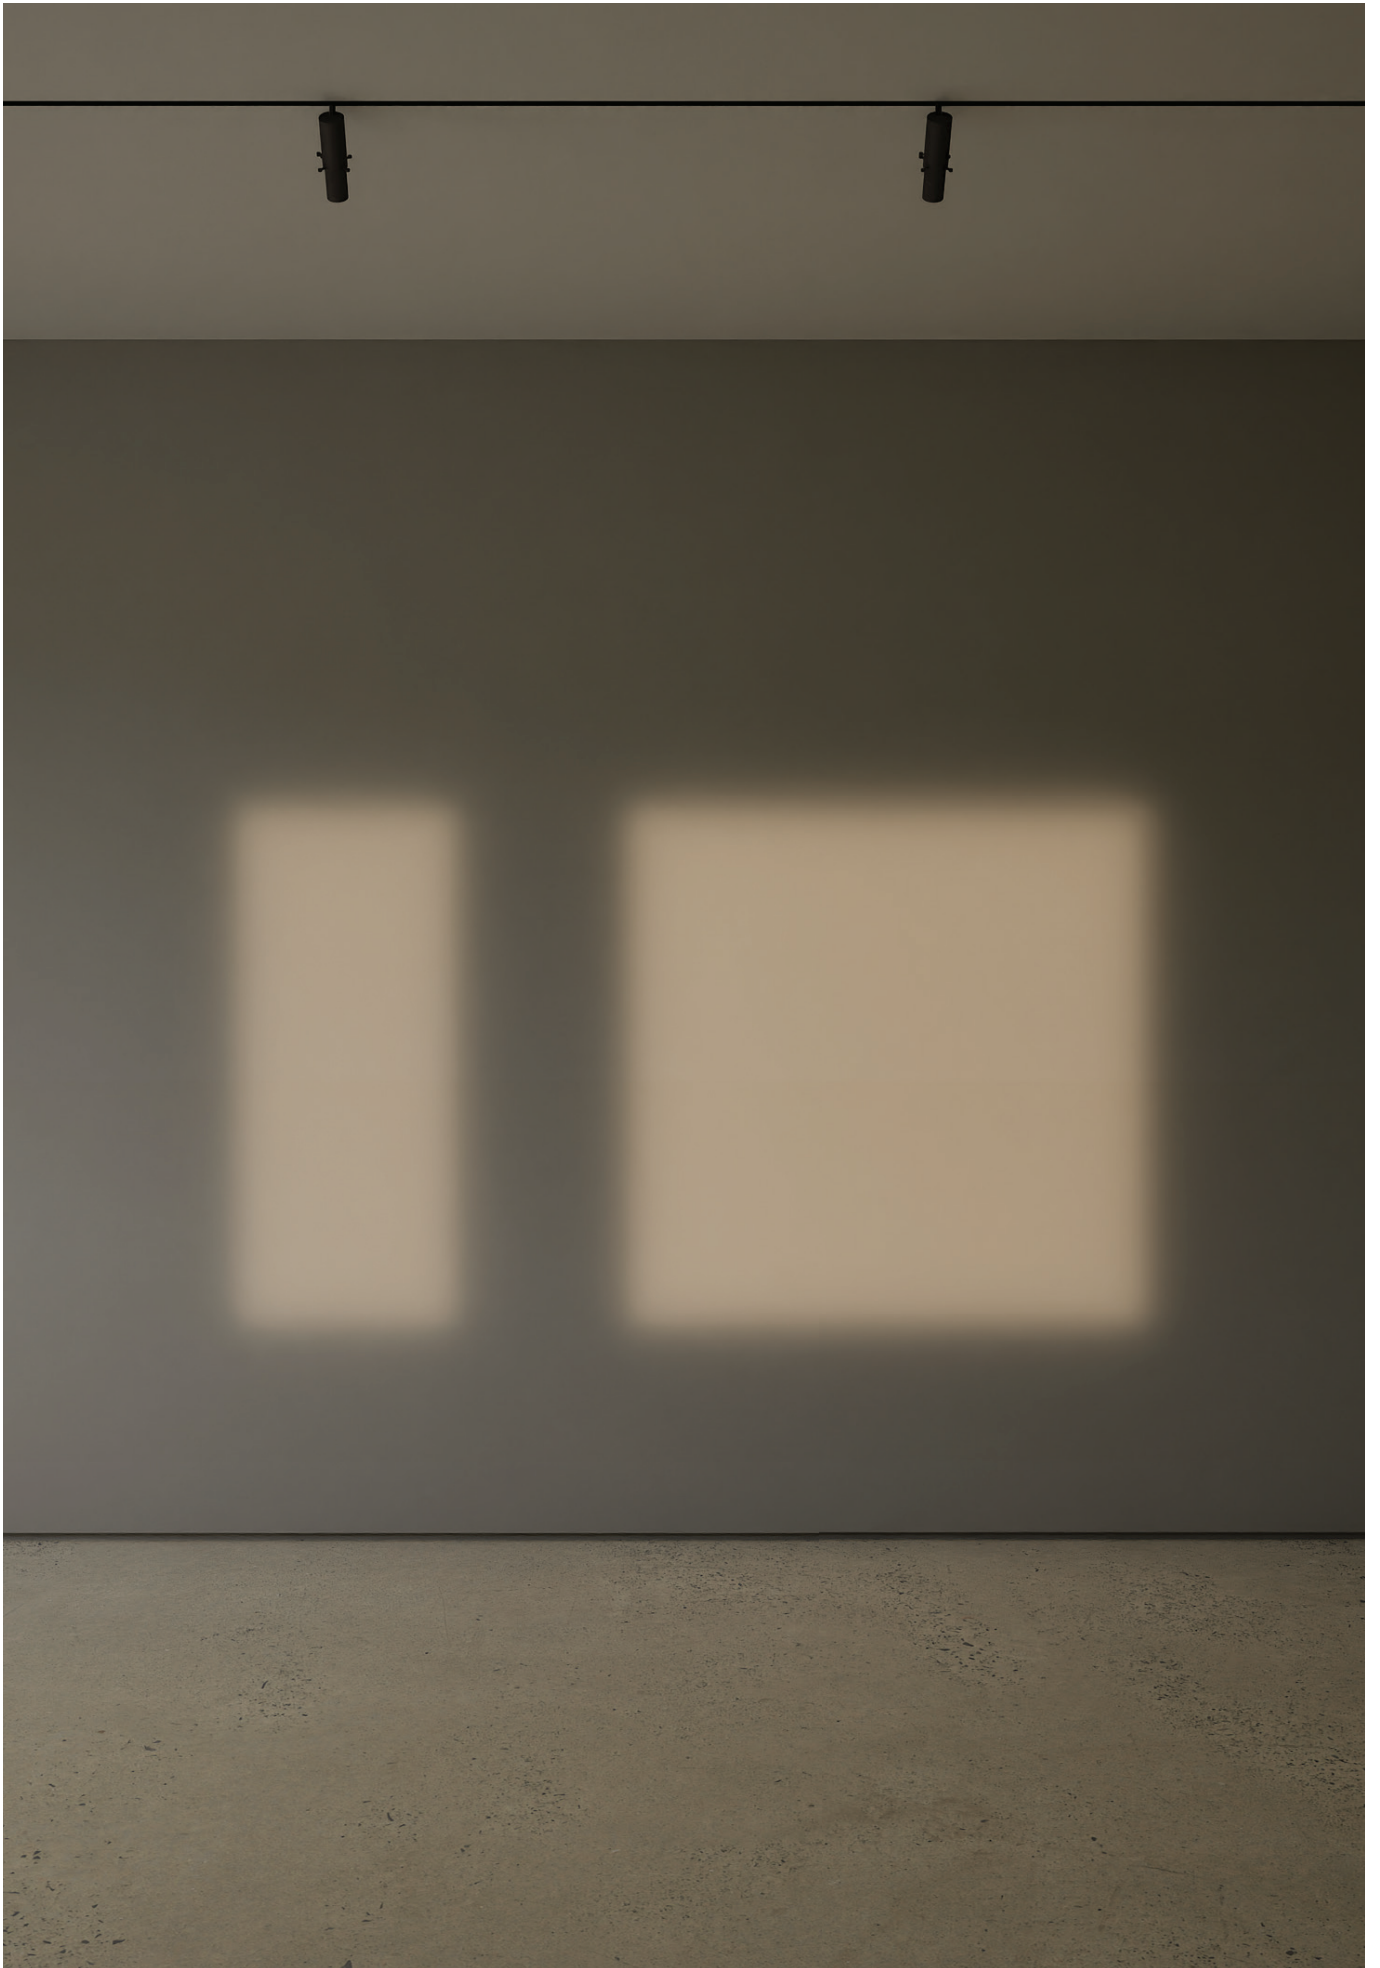



48V



Ori

Z2970-10.24.**|1|.2|.3|**

Power	10W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	800lm
Color rendering index	CRI>90

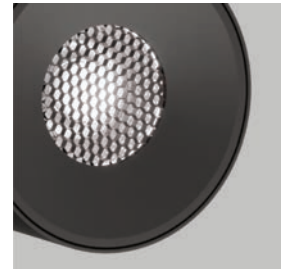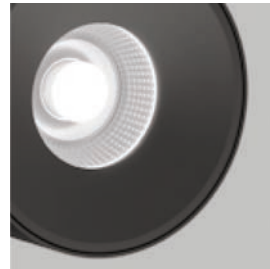

with Honeycomb anti-glare louver

OPTIONS


Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D


* On request





Cube Lenses 6 Z2935-6.24.|1|.2|.3|

Power	6W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	480lm
Color rendering index	CRI>90

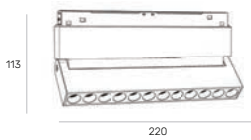

Cube Lenses 12 Z2935-12.24.|1|.2|.3|

Power	12W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	960lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black	BK
2	White	WH

Dim options		
3	Non-DIM	
3	*DIM - TRIAC	T
3	*DIM - DALI	D

* On request



48V



Cube Line 6

Z2935-6.OP.**|1|.2|.3|**

Power	6W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	480lm
Color rendering index	CRI>90



Cube Line 12

Z2935-12.OP.**|1|.2|.3|**

Power	12W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	960lm
Color rendering index	CRI>90



OPTIONS


Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request






Dotty 6

Z2981-6.24.**|1|.2|.3|**

Power	6W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	480lm
Color rendering index	CRI>90



Dotty 12

Z2981-12.24.**|1|.2|.3|**

Power	12W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	960lm
Color rendering index	CRI>90



Dotty 18

Z2981-18.24.**|1|.2|.3|**

Power	18W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	1440lm
Color rendering index	CRI>90




OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40


Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request

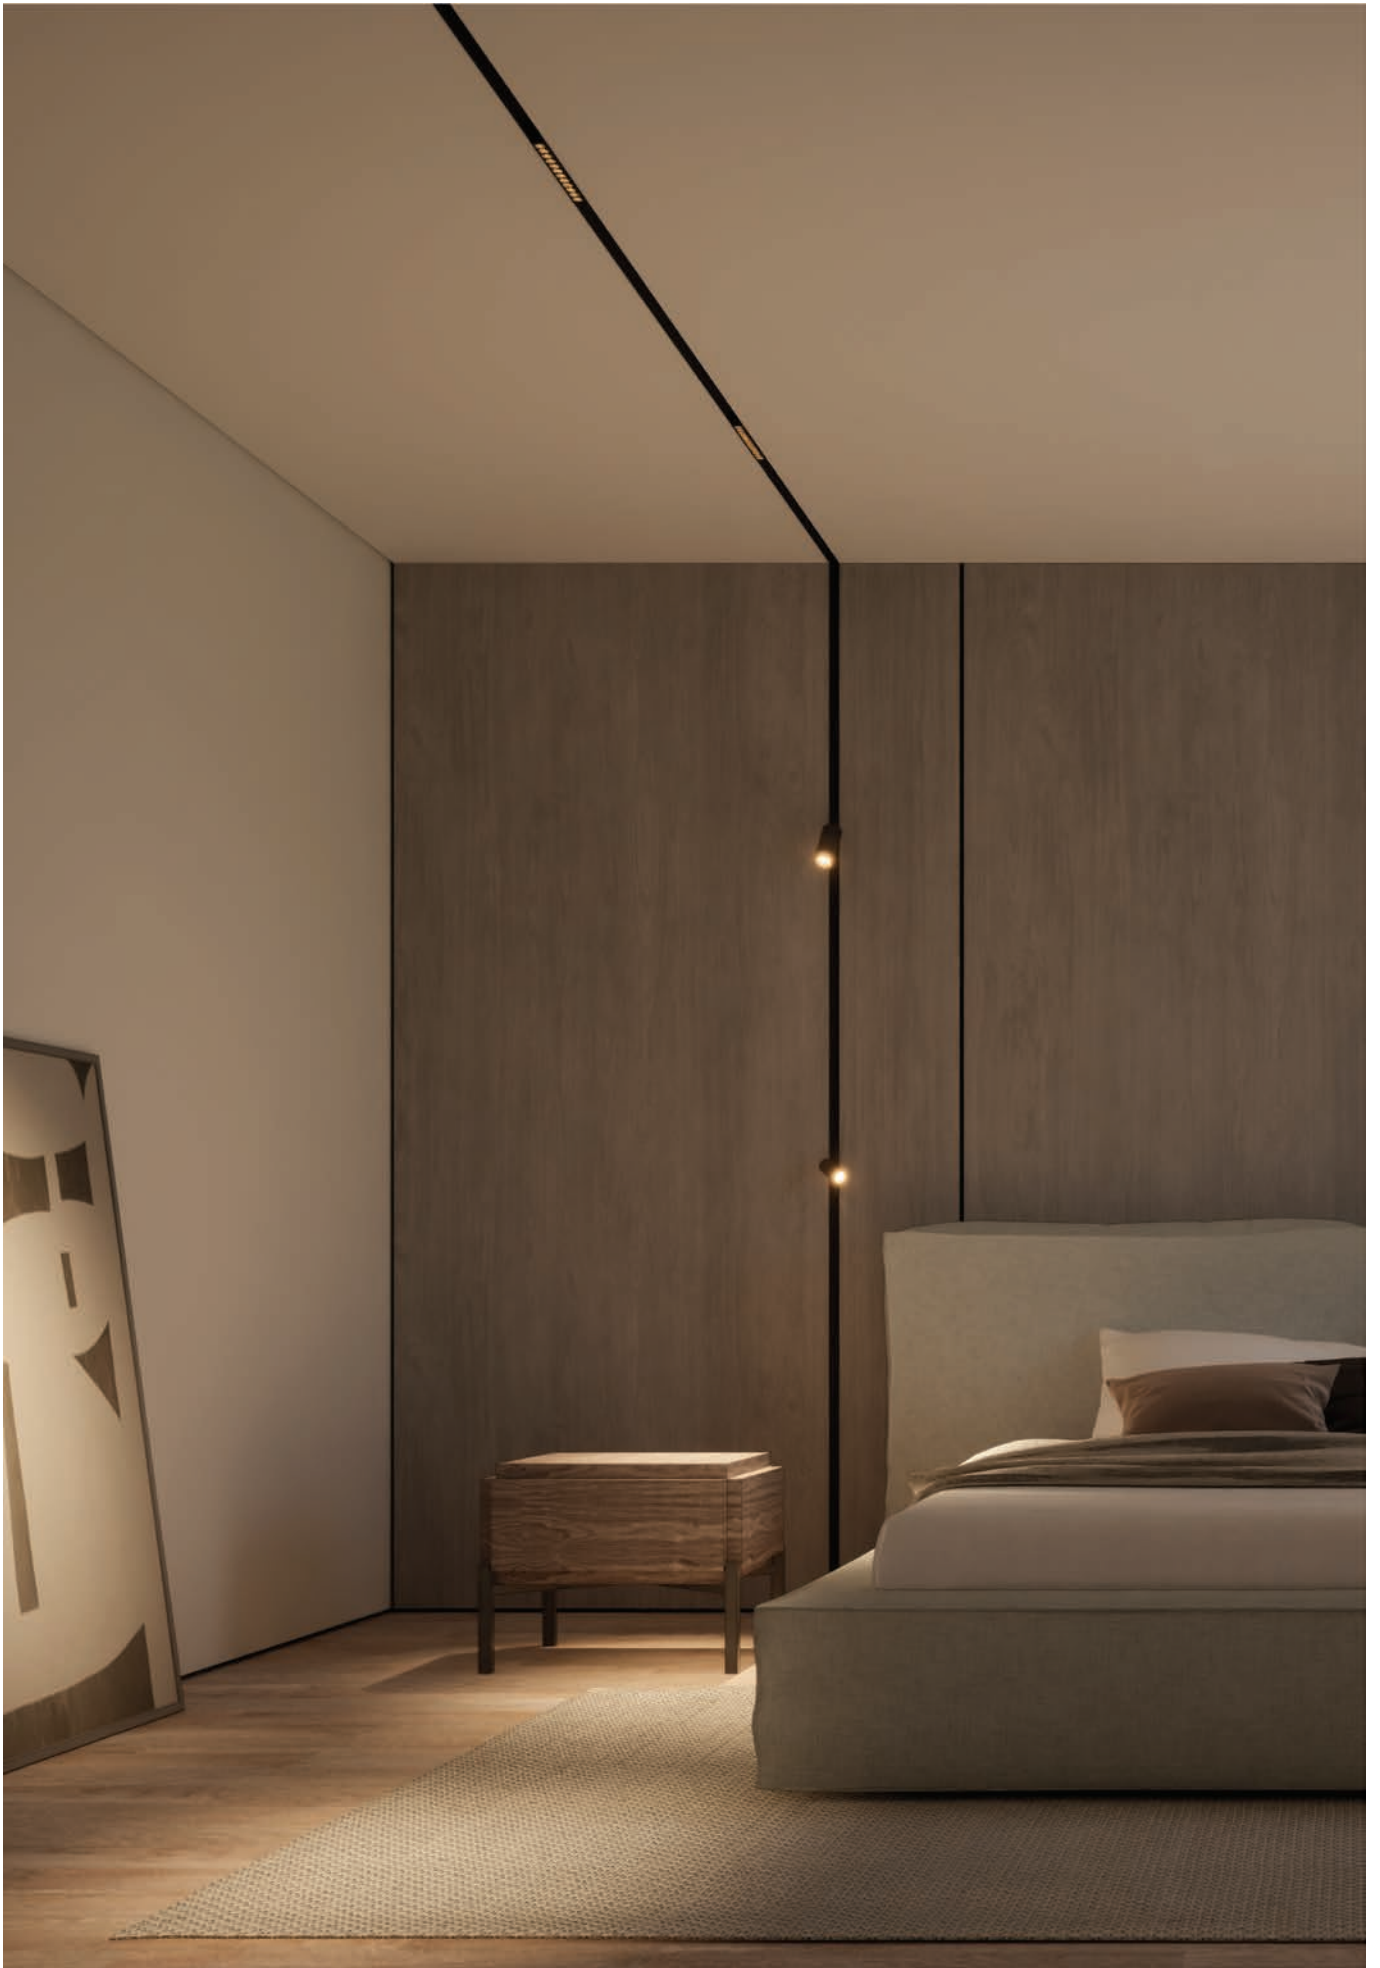

48V

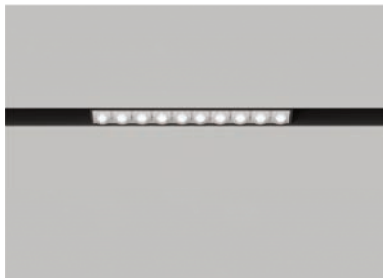

Cube

Z2944-8.20-35.**|1|.2|.3|**

Power	8W
Beam angle	20°-35°
Color temperature	2700K/3000K/4000K
Light efficiency	640lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request





Row 15

Z2992-15.0P.**|1|.2|.3|**


Power	15W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	1200lm
Color rendering index	CRI>90



Row 20

Z2992-20.0P.**|1|.2|.3|**

Power	20W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	1600lm
Color rendering index	CRI>90

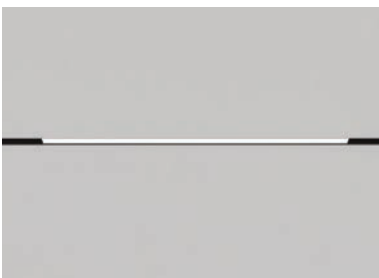

Row 30

Z2992-30.0P.**|1|.2|.3|**

Power	30W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	2400lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black	BK
 2 	White	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM - TRIAC	T
 3 	*DIM - DALI	D

* On request



Lite

surface system



Quickinfo

GENERAL

surface

IP 20


ELECTRICAL

NON DIM, DIM-TRIAC

PHYSICAL

aluminium

spray powder



Spark 9



Spark 18



Mod



Beam



Nexa



Stella



Geo



Halo



Pico



Wisp




Echo



Halo Wire



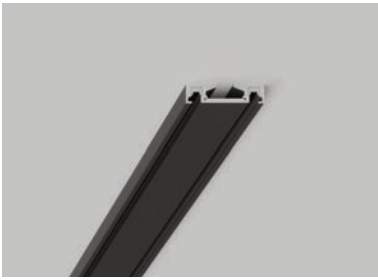

Lite surface

order installation track, light insets + mounting accessories separately

INSTALLATION TRACK




track surface 2000mm 48V | black

ORDER CODE

Z3000-48.SR.200.BK


CONNECTORS



straight connector surface | black

ORDER CODE


Z3000-48.SC.BK



L corner connector surface 90° | black

ORDER CODE


Z3000-48.LCC.BK



T corner connector surface | black

ORDER CODE


Z3000-48.TCC.BK



X corner connector surface | black

ORDER CODE


Z3000-48.XCC.BK



vertical corner connector surface 90° | black

ORDER CODE

Z3000-48.VCC.BK

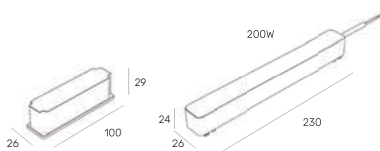

LED DRIVER *optional dimmable for TRIAC

led driver 48V 200W for installing on track Lite | black


ORDER CODE

Z3000-48.DR.200.BK

driver cover for electrical connection on track Lite | black

Z3000-48.DRC.BK


remote drivers on driver page XXX



Spark 9

Z3015-9.36.**|1|.BK.|3|**

Power	9W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	610lm
Color rendering index	CRI>90



Spark 18

Z3015-18.36.**|1|.BK.|3|**

Power	18W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	1220lm
Color rendering index	CRI>90



OPTIONS

Colour temperature

 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Dim options

 3 	Non-DIM	
 3 	*DIM-TRIAC	T

* On request




48V



Mod

Z3020-6.36.**|1|.BK.|3|**

Power	6W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	355lm
Color rendering index	CRI>90



Beam

Z3025-6.36.**|1|.BK.|3|**

Power	6W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	400lm
Color rendering index	CRI>90



OPTIONS

Colour temperature

 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40



Dim options

 3 	Non-DIM	
 3 	*DIM-TRIAC	T

* On request





48V

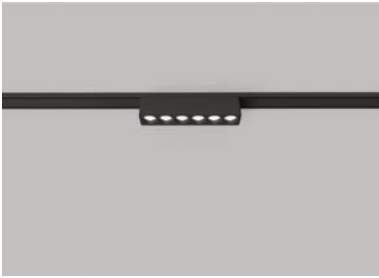

Nexa 6

Z3030-6.24.**|1|.BK.|3|**


Power	6W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	423lm
Color rendering index	CRI>90

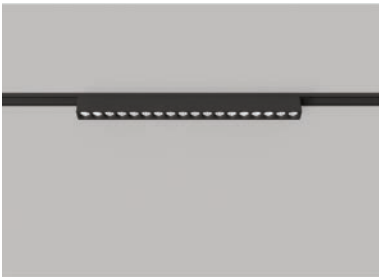

Nexa 18

Z3030-18.24.**|1|.BK.|3|**

Power	18W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	1370lm
Color rendering index	CRI>90

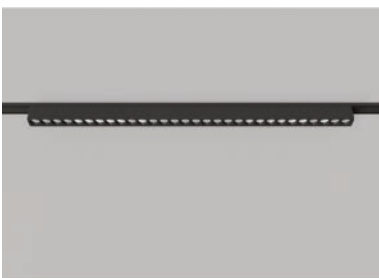

Nexa 30

Z3030-30.24.**|1|.BK.|3|**

Power	30W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	2200lm
Color rendering index	CRI>90



OPTIONS


Colour temperature	
 1 *2700K warm light	27
 1 3000K home light	30
 1 *4000K natur light	40

Dim options	
 3 Non-DIM	
 3 *DIM-TRIAC	T

* On request



48V

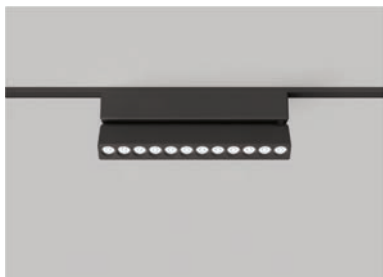

Stella

Z3035-12.24.1|.BK.3|

Power	12W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	810lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black	BK
2	White	WH

Dim options		
3	Non-DIM	
3	*DIM-TRIAC	T

* On request




48V



Geo 10

Z3040-10.OP.1|.BK.3|

Power	10W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	600lm
Color rendering index	CRI>90

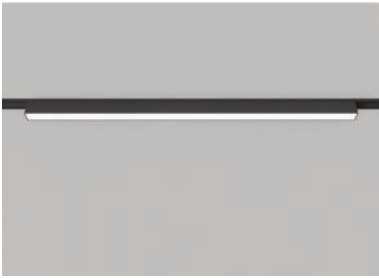

Geo 20

Z3040-20.OP.1|.BK.3|

Power	20W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	1200lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Dim options		
3	Non-DIM	
3	*DIM-TRIAC	T

* On request




48V



Halo

Z3055-6.OP. | 1 | .BK. | 3 |

Power	6W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	535lm
Color rendering index	CRI>90



Pico

Z3050-20.OP. | 1 | .BK. | 3 |

Power	20W
Beam angle	180°
Color temperature	2700K/3000K/4000K
Light efficiency	1700lm
Color rendering index	CRI>90




OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Dim options		
3	Non-DIM	
3	*DIM-TRIAC	T

* On request





Wisp

Z3070-16.OP.|1|.BK.|3|


Power	16W
Beam angle	360°
Color temperature	2700K/3000K/4000K
Light efficiency	1080lm
Color rendering index	CRI>90



Halo Wire

Z3065-6.OP.|1|.BK.|3|

Power	6W
Beam angle	100°
Color temperature	2700K/3000K/4000K
Light efficiency	535lm
Color rendering index	CRI>90



Echo

Z3060-7.24.|1|.BK.|3|

Power	7W
Beam angle	24°
Color temperature	2700K/3000K/4000K
Light efficiency	343lm
Color rendering index	CRI>90



OPTIONS

Colour temperature	
1 *2700K warm light	27
1 3000K home light	30
1 *4000K natur light	40

Dim options	
3 Non-DIM	
3 *DIM-TRIAC	T

* On request



Luma

surface system



Quickinfo

GENERAL

surface/suspended

IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium

brushed



22

17

Zest



Quik



Eys



Zen



Flare



Glow



Glow Wire



Frost




Trill





Luma surface/suspended

order installation track, light insets + mounting accessories separately

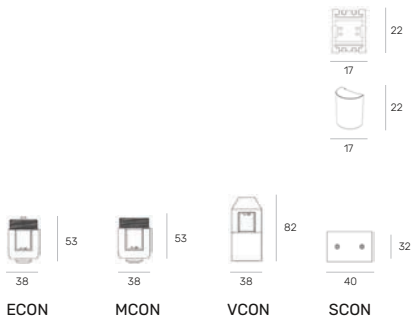

INSTALLATION TRACK

track surface 2000mm 48V | brass

ORDER CODE

Z4000-48.SR.200.BR

end cap for track Z4000 | brass

Z4000-48.EC.BR

electrical connector | brass

Z4000-48.ECON.BR

mechanical connector | brass


Z4000-48.MCON.BR

vertical connector | brass

Z4000-48.VCON.BR

straight connector | brass

Z4000-48.SCON.BR

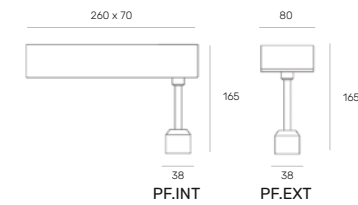

POWER FEEDER


power feeder for track Luma for internal driver 48V | brass

ORDER CODE

Z4000-48.PF.INT.BR

power feeder for track Luma for external driver 48V | brass

Z4000-48.PF.EXT.BR

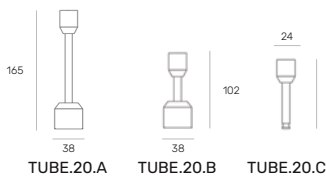

TUBE

tube A for track Luma for 200mm | brass

ORDER CODE


Z4000-48.TUBE.20.A.BR

tube B for track Luma for 200mm | brass

Z4000-48.TUBE.20.B.BR

tube C for track Luma for 200mm | brass

Z4000-48.TUBE.20.C.BR

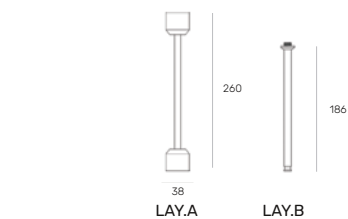

TUBE LAYER


tube layer A for track Luma | brass

ORDER CODE

Z4000-48.TUBE.LAY.A.BR

tube layer B for track Luma | brass

Z4000-48.TUBE.LAY.B.BR

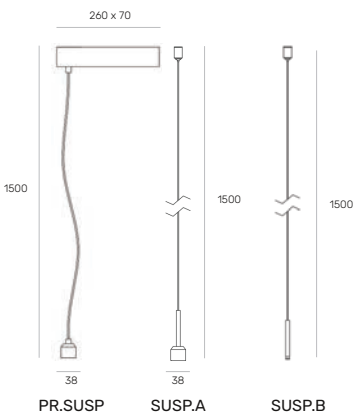

SUSPENDED

power feeder suspended for track Luma for internal driver 48V

ORDER CODE

Z4000-48.PF.SUSP.BR

suspension A for track Luma | brass

Z4000-48.SUSP.A.BR

suspension B for track Luma | brass

Z4000-48.SUSP.B.BR

LED DRIVER

led driver 48V 100W remote 190 | 52 | H37 mm

ORDER CODE

Z48-DR.100W.EXT

led driver 48V 150W remote 191 | 63 | H38 mm


Z48-DR.150W.EXT

led driver 48V 200W remote DIM 0-10V 195 | 68 | H40 mm

Z48-DR.200W.EXT.D

*optional dimmable for TRIAC

remote drivers on driver page XXX



Zest

Z4020-8.36.**|1|**.BR



Power	8W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	474lm
Color rendering index	CRI>90



Quik

Z4015-8.36.**|1|**.BR

Power	8W
Beam angle	36°
Color temperature	2700K/3000K/4000K
Light efficiency	474lm
Color rendering index	CRI>90

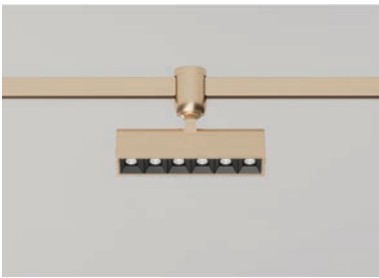

Eys

Z4035-8.48.**|1|**.BR

Power	8W
Beam angle	48°
Color temperature	2700K/3000K/4000K
Light efficiency	500lm
Color rendering index	CRI>90



OPTIONS

Colour temperature	
 1 *2700K warm light	27
 1 3000K home light	30
 1 *4000K natur light	40

Colour	
Brass	BR

* On request




48V



Zen

Z4022-12.OP.1|.BR.3|

Power	12W
Beam angle	120°
Color temperature	2700K/3000K/4000K
Light efficiency	780lm
Color rendering index	CRI>90



Flare

Z4040-15.OP.1|.BR.3|

Power	15W
Beam angle	120°
Color temperature	2700K/3000K/4000K
Light efficiency	1044lm
Color rendering index	CRI>90



OPTIONS

Colour temperature	
1 *2700K warm light	27
1 3000K home light	30
1 *4000K natur light	40

Colour	
2 Brass	BR

* On request




48V



Glow

Z4055-5.OP.|1|.BR.|3|

Power	5W
Beam angle	350°
Color temperature	2700K/3000K/4000K
Light efficiency	486lm
Color rendering index	CRI>90



Glow Wire

Z4065-5.OP.|1|.BR.|3|

Power	5W
Beam angle	350°
Color temperature	2700K/3000K/4000K
Light efficiency	486lm
Color rendering index	CRI>90



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Brass	BR

* On request



48V



Frost

Z4056-5.OP.|1|.BR.|3|

Power	5W
Beam angle	350°
Color temperature	2700K/3000K/4000K
Light efficiency	288lm
Color rendering index	CRI>90



Trill

Z4058-5.OP.|1|.BR.|3|

Power	5W
Beam angle	350°
Color temperature	2700K/3000K/4000K
Light efficiency	288lm
Color rendering index	CRI>90



OPTIONS

Colour temperature	
1 *2700K warm light	27
1 3000K home light	30
1 *4000K natur light	40


Colour	
2 Brass	BR

* On request



Muse

surface system

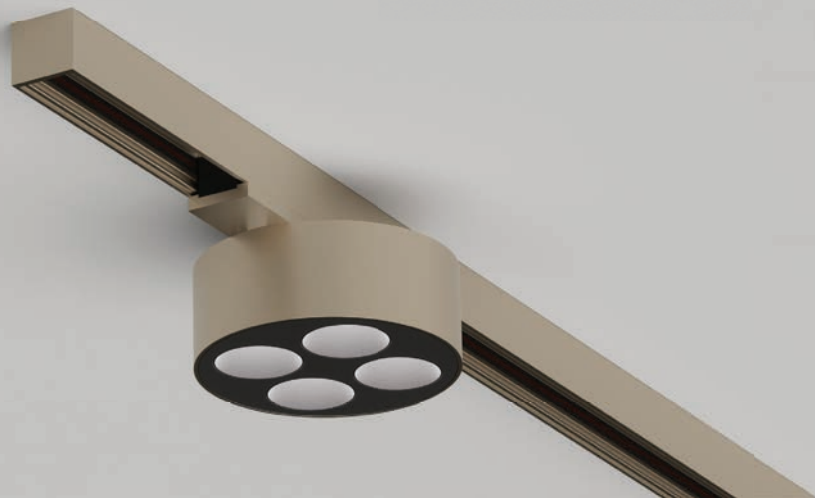

Quickinfo

GENERAL

surface/suspended

IP 20


ELECTRICAL

NON DIM, DIM optional

PHYSICAL

aluminium

brushed

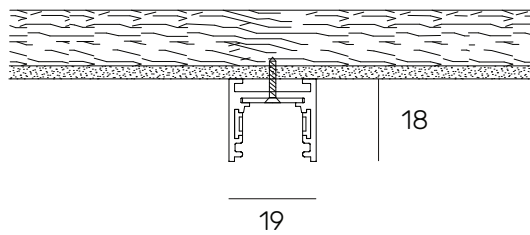

Axis



Verta



Glorio



Arcus




Quadra



Lineo



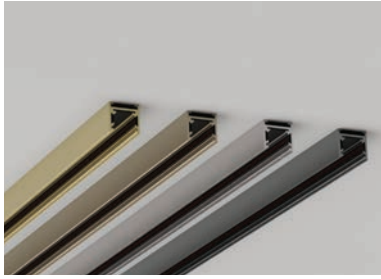

Muse surface/suspended

order installation track, light insets + mounting accessories separately

INSTALLATION TRACK

ORDER CODE

track Muse surface/suspended 1500mm 48V

Z5000-48.SR.150. | 2 |

horizontal corner 90° with connect plate

Z5000-48.SR.HC. | 2 |

vertical corner 90° with connect plate

Z5000-48.SR.VC. | 2 |

connect plate

Z5000-48.CP

decorative cap for Muse track L500mm

Z5000-48.DC.50. | 2 |

end cap Muse low side (2.pcs)

Z5000-48.SR.EC. | 2 |

end cap Muse high side (2.pcs)-using with decorative cap

Z5000-48.SR.ECD. | 2 |

POWER FEEDER/CONNECTOR ELECTRICAL

ORDER CODE

power feeder for track Muse 48V

Z5000-48.PF. | 2 |

corner power connector Muse 48V

Z5000-48.LCC. | 2 |

corner power connector Muse 48V (on perpendicular planes)

Z5000-48.VCC. | 2 |

straight power connector Muse 48V

Z5000-48.SC. | 2 |

SUSPENDED

ORDER CODE

power wire 2000mm (0.75mm²) with feeder

Z5000-48.PW.200. | 2 |

suspension cable 2000mm with mounting base

Z5000-48.SUSP.200. | 2 |

LED DRIVER

ORDER CODE





led driver Muse 48V 150W in track

Z5000-48.DR.150. | 2 |

remote drivers on driver page XXX

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC


48V




Axis

Z5015-8.36.30.2


Power	8W
Beam angle	36°
Color temperature	3000K
Light efficiency	590lm
Color rendering index	CRI>90



Matt Gold



Black Nickel



Sand Nickel



Champagne

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC



48V



Verta

Z5020-8.36.30.2

Power	8W
Beam angle	36°
Color temperature	3000K
Light efficiency	685lm
Color rendering index	CRI>90



Matt Gold



Black Nickel



Sand Nickel




Champagne

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC

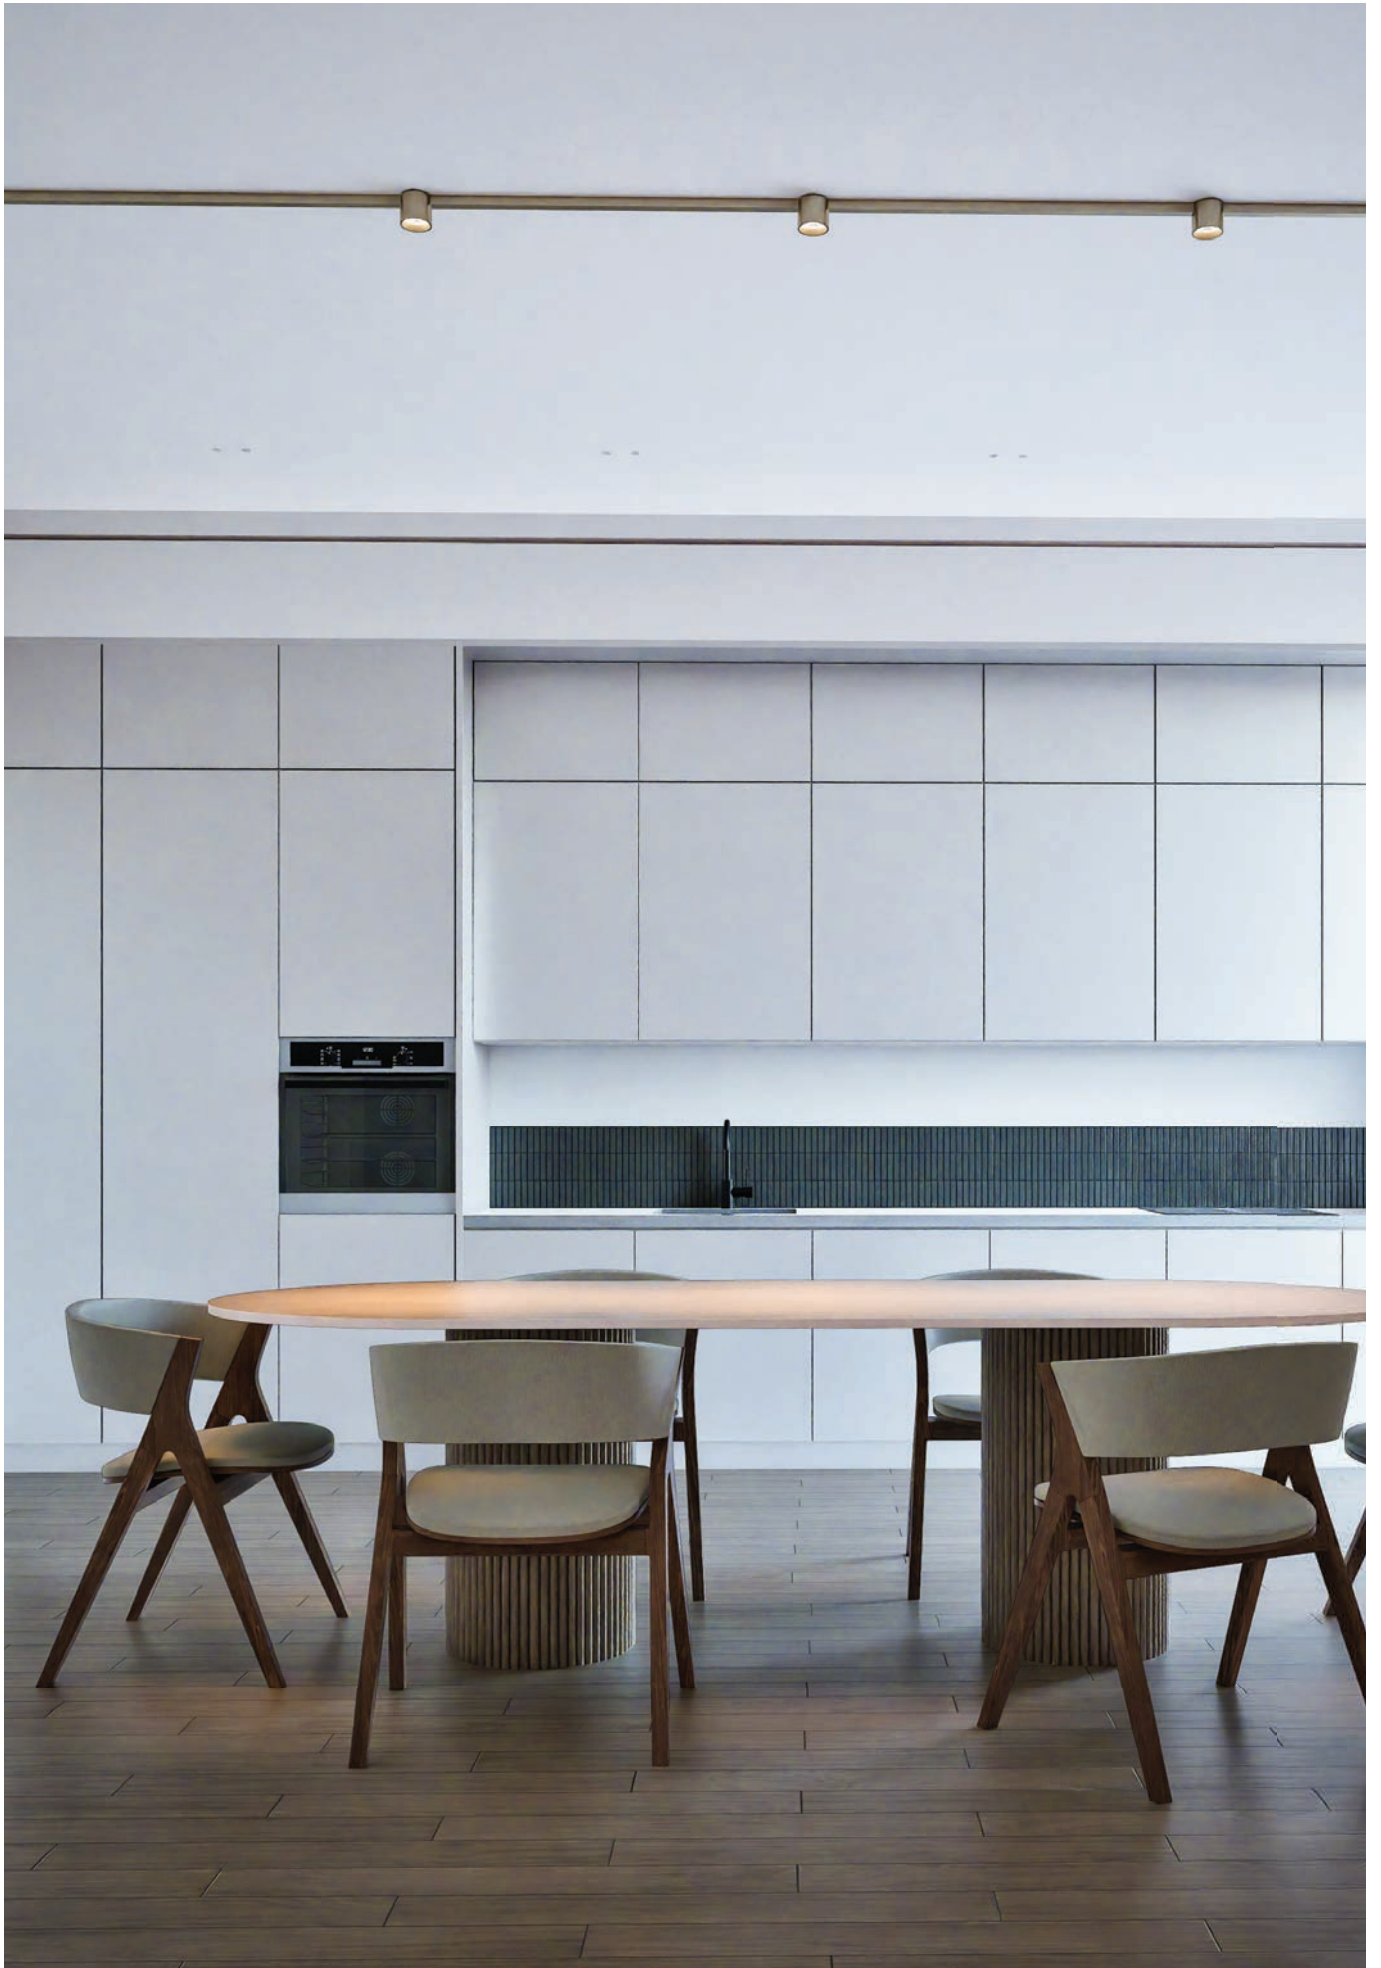

48V



Quadra

Z5035-6.36.30.2

Power	6W
Beam angle	36°
Color temperature	3000K
Light efficiency	476lm
Color rendering index	CRI>90



Matt Gold



Black Nickel



Sand Nickel




Champagne

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC

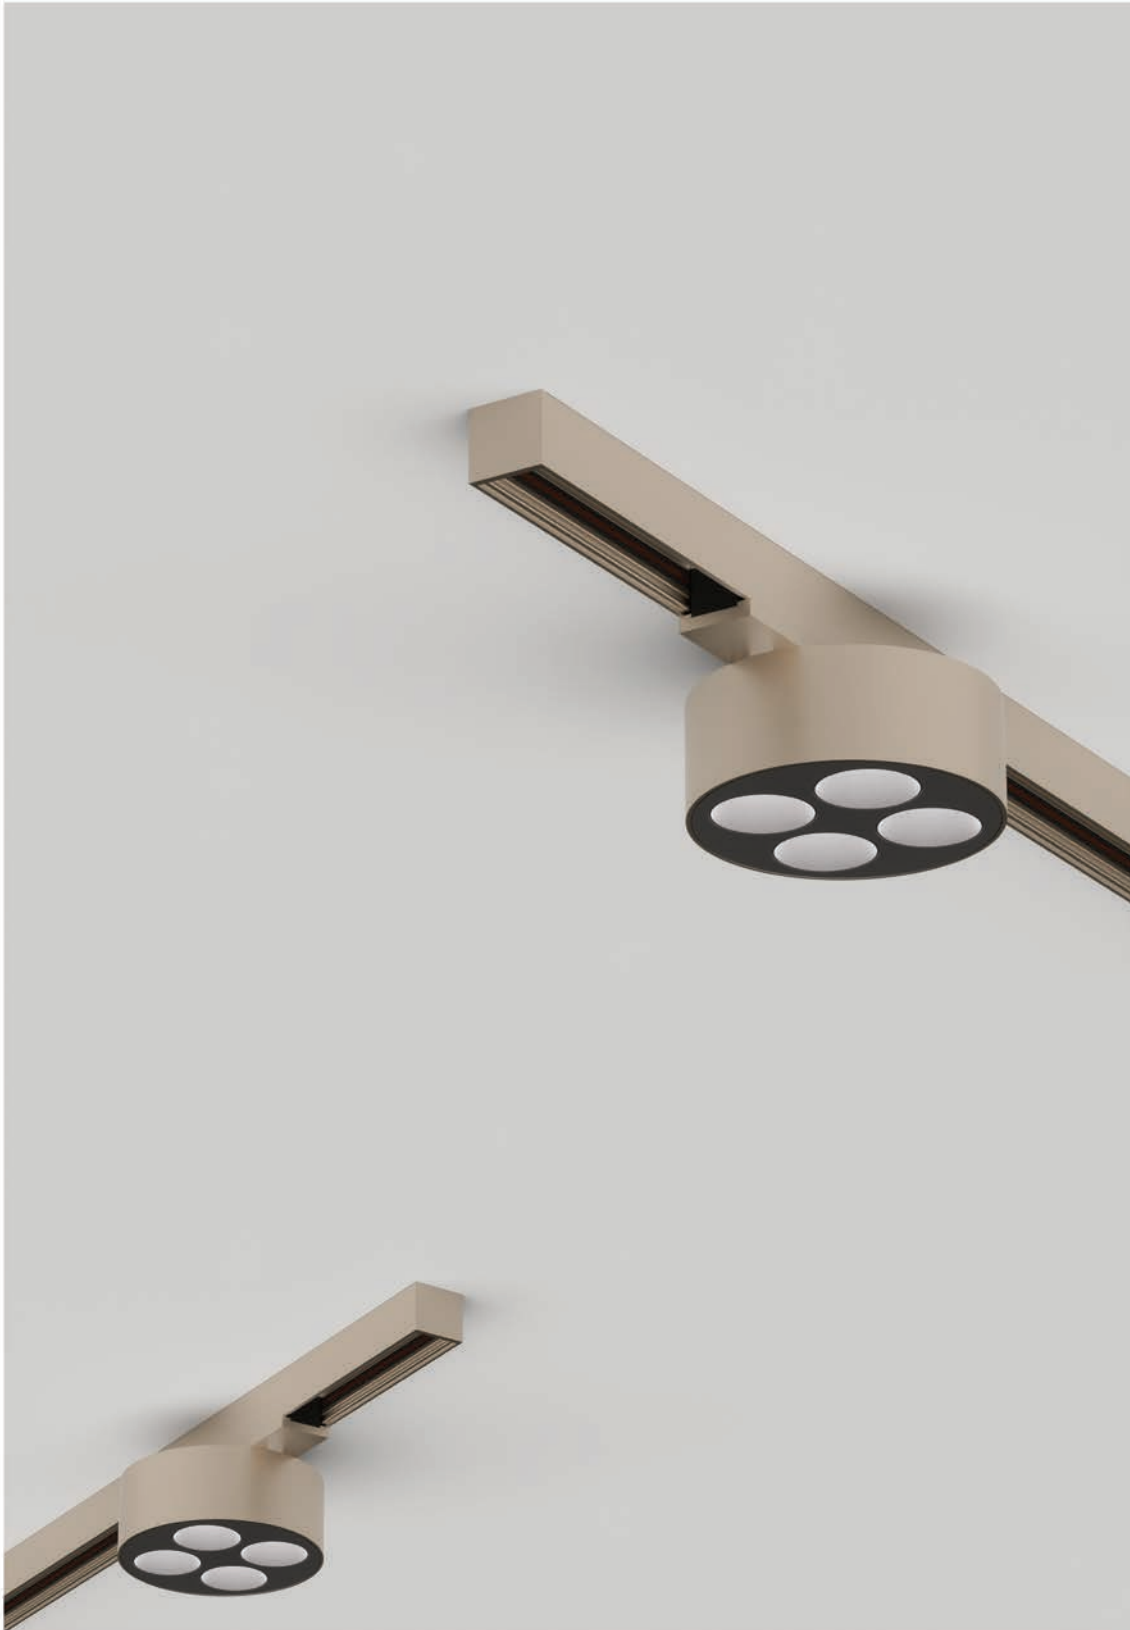

48V



Glorio

Z5022-15.OP.30. | 2 |

Power	15W
Beam angle	120°
Color temperature	3000K
Light efficiency	1225lm
Color rendering index	CRI>90



Matt Gold



Black Nickel



Sand Nickel




Champagne

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC



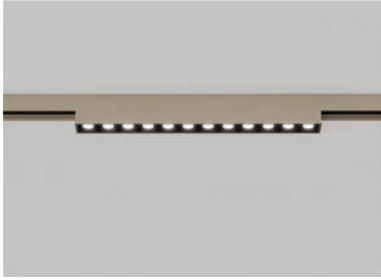

Arcus


Z5030-10.36.30.2

Power	10W
Beam angle	36°
Color temperature	3000K
Light efficiency	89lm
Color rendering index	CRI>90


27



232




Matt Gold



Black Nickel



Sand Nickel




Champagne

OPTIONS

Colour

2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC



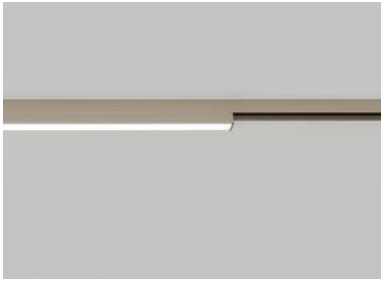

Lineo

Z5040-24.OP.30.2

Power	24W
Beam angle	120°
Color temperature	3000K
Light efficiency	1384lm
Color rendering index	CRI>90



600



Matt Gold



Black Nickel



Sand Nickel




Champagne


OPTIONS

Colour			
2	Matt Gold		BR
2	Black Nickel		TI
2	Sand Nickel		NI
2	Champagne		LC



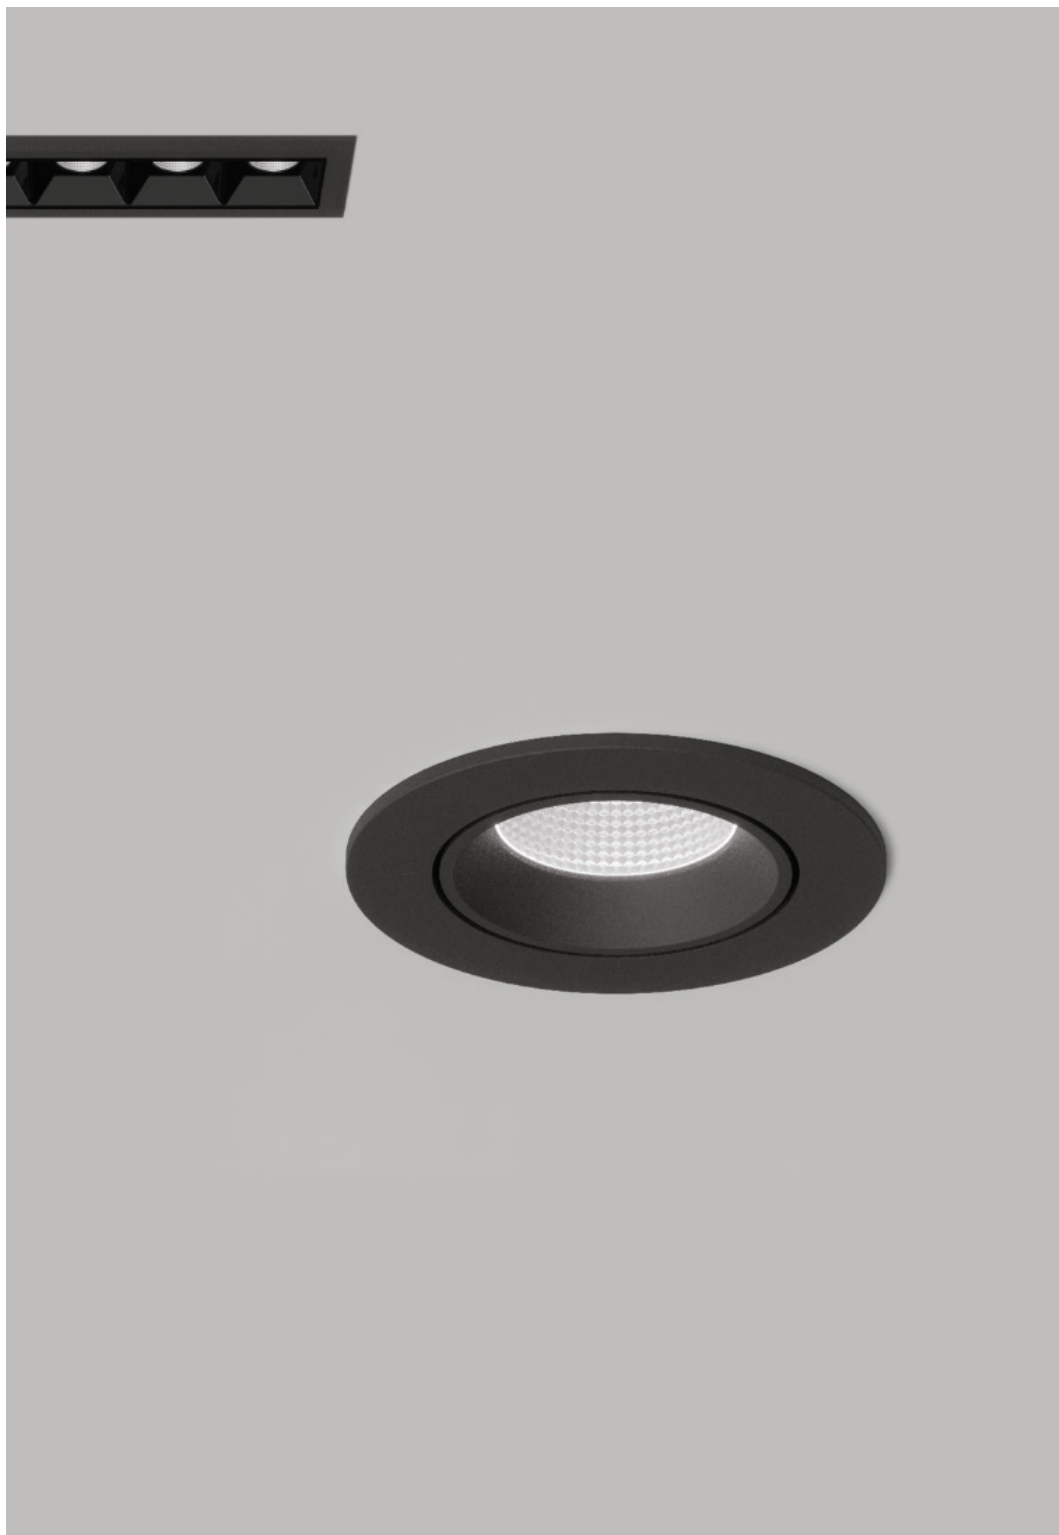


— **recessed**

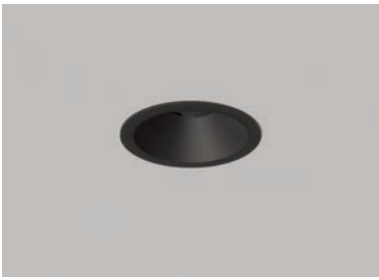

Blaze R 7

Z09681-7.36.**|1|.2|.3|**

Power	7W
Beam angle	36°
Color temperature	3000K
Light efficiency	435lm
Color rendering index	CRI>90
Size	D62 H65mm cut-out: D55mm
IP	IP20
Material	aluminium, spray powder



Blaze R 10

Z09682-10.36.**|1|.2|.3|**

Power	10W
Beam angle	36°
Color temperature	3000K
Light efficiency	635lm
Color rendering index	CRI>90
Size	D72 H70mm cut-out: D65mm
IP	IP20
Material	aluminium, spray powder



OPTIONS



Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D
 3 	*DIM-TRIAC	T

* On request





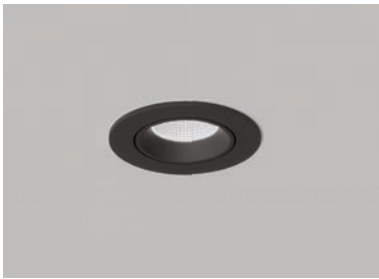

Flo 7

Z08977-7.36.|1|.2|.3|

Power	7W
Beam angle	36°
Color temperature	3000K
Light efficiency	440lm
Color rendering index	CRI>90
Size	D79 H55mm cut-out: D65mm
IP	IP20
Material	aluminium, spray powder

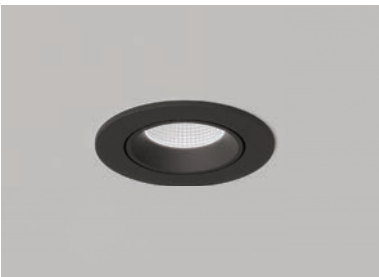

Flo 10

Z08978-10.36.|1|.2|.3|

Power	10W
Beam angle	36°
Color temperature	3000K
Light efficiency	700lm
Color rendering index	CRI>90
Size	D85 H65mm cut-out: D75mm
IP	IP20
Material	aluminium, spray powder



OPTIONS



Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request




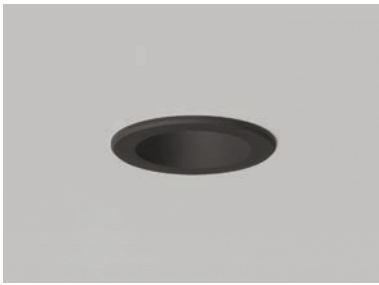

Radi

Z08202-10.45.**|1|.2|.3|**



Power	10W
Beam angle	45°
Color temperature	3000K
Light efficiency	760lm
Color rendering index	CRI>90
Size	D85 H65mm cut out:D75mm
IP	IP44
Material	aluminium, spray powder



Aura 7

Z08657-7.60.**|1|.2|.3|**

Power	7W
Beam angle	60°
Color temperature	3000K
Light efficiency	430lm
Color rendering index	CRI>90
Size	D62 H58mm cut-out: D55mm
IP	IP65
Material	aluminium, spray powder

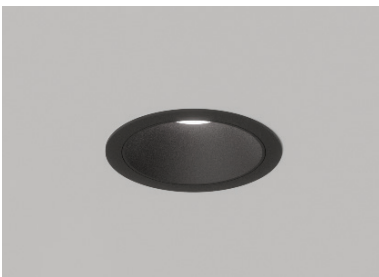

Aura 10

Z08658-10.60.**|1|.2|.3|**

Power	10W
Beam angle	60°
Color temperature	3000K
Light efficiency	700lm
Color rendering index	CRI>90
Size	D83 H62mm cut-out: D75mm
IP	IP65
Material	aluminium, spray powder



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D
 3 	*DIM-TRIAC	T

* On request






Rise 5 R

Z05553-10.38.**|1|.2|.3|**

Power	5x2W
Beam angle	38°
Color temperature	3000K
Light efficiency	650lm
Color rendering index	CRI>90
Size	L147 W45 H50mm cut-out: L139 W37mm
IP	IP20
Material	aluminium, spray powder



Rise 10 R

Z05554-20.38.**|1|.2|.3|**

Power	10x2W
Beam angle	38°
Color temperature	3000K
Light efficiency	1335lm
Color rendering index	CRI>90
Size	L279 W45 H50mm cut-out: L272 W37mm
IP	IP20
Material	aluminium, spray powder




OPTIONS


Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D
 3 	*DIM-TRIAC	T


* On request

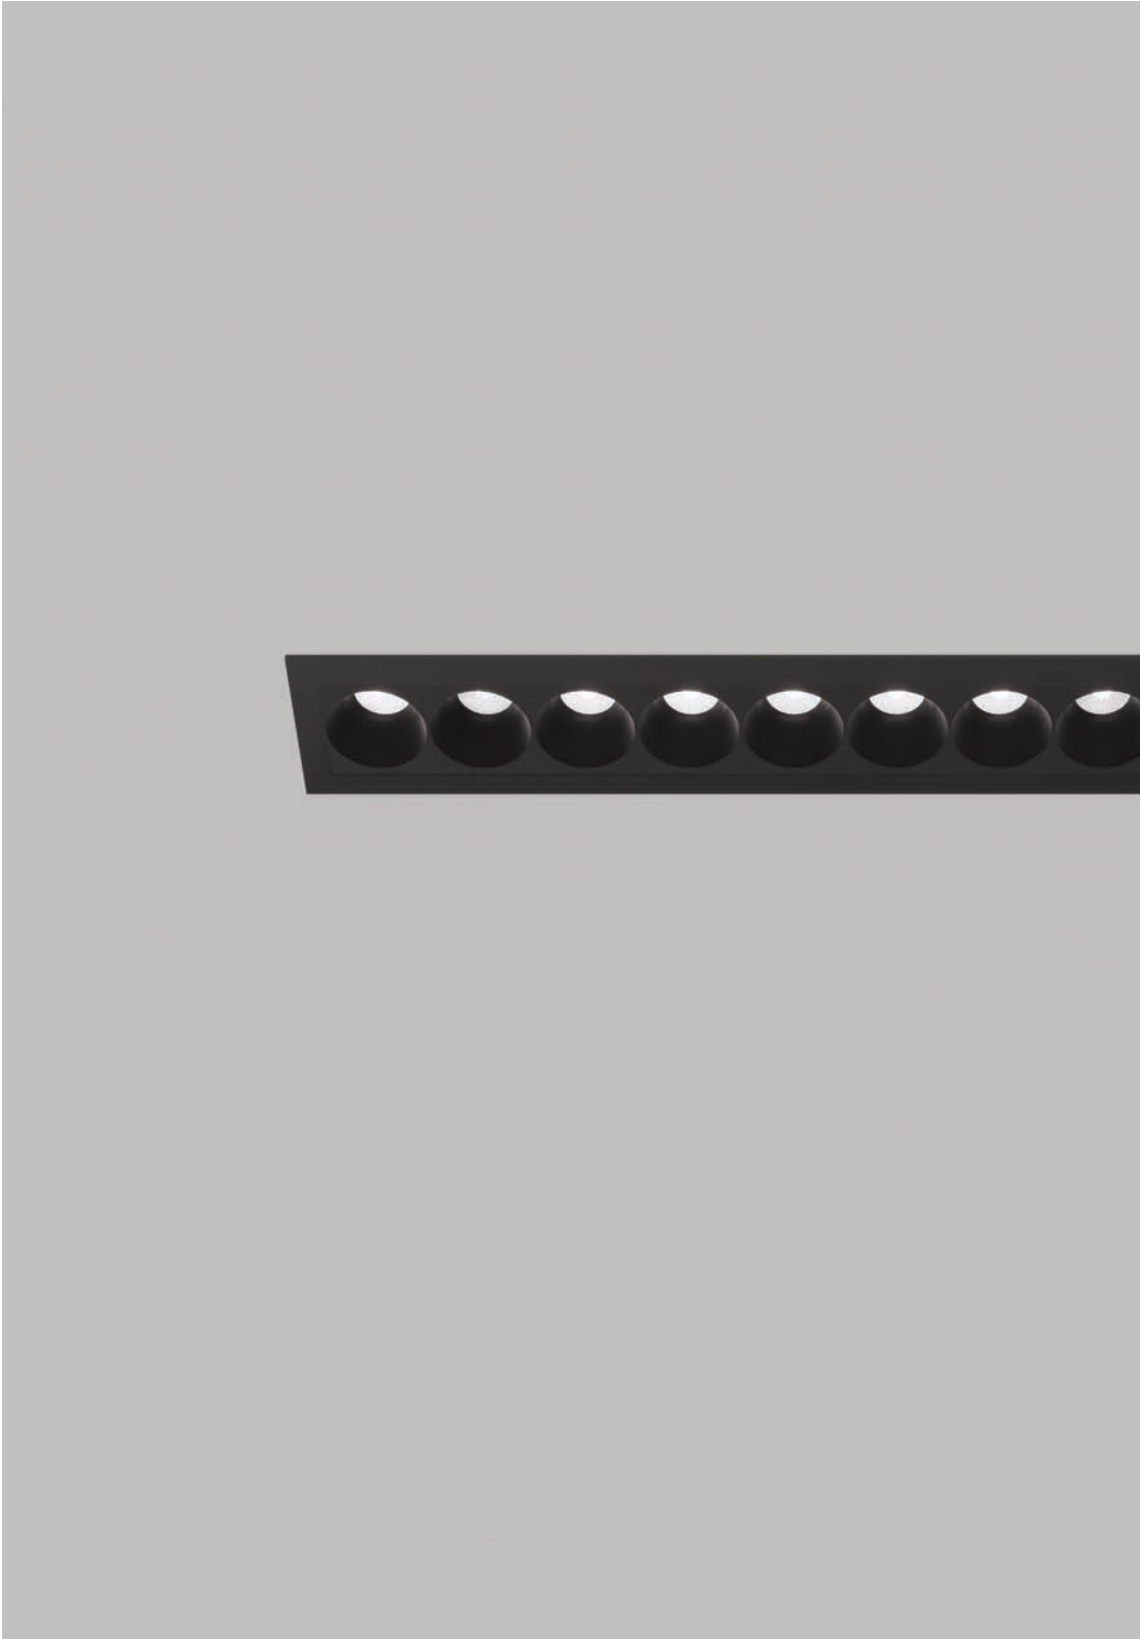



Loom R 5 **Z08736-10.45.1|.2|.3|**

Power	5x2W
Beam angle	45°
Color temperature	3000K
Light efficiency	850lm
Color rendering index	CRi>90
Size	L147 W45 H50mm cut-out: L139 W37mm
IP	IP20
Material	aluminium, spray powder



Loom R 10 **Z08736-20.45.1|.2|.3|**

Power	10x2W
Beam angle	45°
Color temperature	3000K
Light efficiency	1700lm
Color rendering index	CRi>90
Size	L294 W45 H50mm cut-out: L278 W37mm
IP	IP20
Material	aluminium, spray powder





OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T


* On request

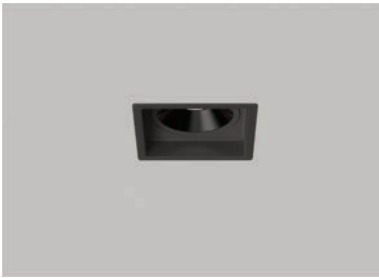

Pure

Z03252-7.24.**|1|.2|.3|**

Power	7W
Beam angle	24°
Color temperature	3000K
Light efficiency	415lm
Color rendering index	CRI>90
Size	L84 W84 H53mm cut-out: L75 W75mm
IP	IP20
Material	aluminium, spray powder



Pure 2

Z03253-14.24.**|1|.2|.3|**

Power	2x7W
Beam angle	24°
Color temperature	3000K
Light efficiency	815lm
Color rendering index	CRI>90
Size	L166 W84 H53mm cut-out: L155 W75mm
IP	IP20
Material	aluminium, spray powder




OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D
 3 	*DIM-TRIAC	T


* On request



Shift

Z09916-12.36.**|1|.2|.3|**

Power	12W
Beam angle	36°
Color temperature	3000K
Light efficiency	960lm
Color rendering index	CRI>90
Size	L135 W135 H90mm cut-out: L100 W100mm
IP	IP20
Material	aluminium, spray powder



Shift 2

Z09917-24.36.**|1|.2|.3|**

Power	2x12W
Beam angle	36°
Color temperature	3000K
Light efficiency	1600lm
Color rendering index	CRI>90
Size	L235 W135 H90mm cut-out: L200 W100mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D
 3 	*DIM-TRIAC	T

* On request



— recessed



Evo R

Z09855-7.36. |1|. |2|. |3|

Power	7W
Beam angle	36°
Color temperature	3000K
Light efficiency	490lm
Color rendering index	CRI>90
Size	D39 H82mm cut-out: D35mm
IP	IP20
Material	aluminium, spray powder





OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T



* On request

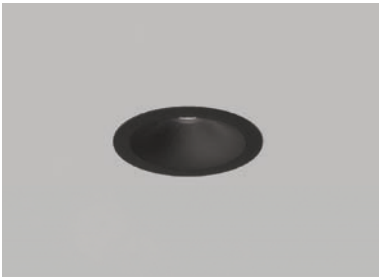

Vibe R

Z09231-9.24. |1|. |2|. |3|

Power	9W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	630lm
Color rendering index	CRI>90
Size	D72 H73mm cut-out: D65mm
IP	IP44
Material	aluminium, spray powder

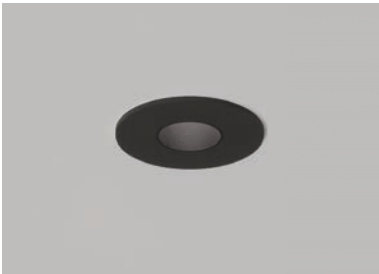

Navi R

Z09233-9.24. |1|. |2|. |3|

Power	9W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	540lm
Color rendering index	CRI>90
Size	D75 H73mm cut-out: D65mm
IP	IP44
Material	aluminium, spray powder




OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request



Flick R

Z08721-10.24. |1|.2|.3|

Power	10W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	545lm
Color rendering index	CRi>90
Size	D52 H120mm cut-out: D55mm
IP	IP20
Material	aluminium, spray powder



with Honeycomb anti-glare louver


OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH
2	White+Black ■	WB

Dim options		
3	Non-DIM	
3	*DIM	D

* On request



Savy R

Z08618-10.38. | 1 | . 2 | . 3 |

Power	10W
Beam angle	38°
Color temperature	3000K
Light efficiency	850lm
Color rendering index	CRi>90
Size	D100 H65mm cut out:D90mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40


Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request



— **recessed
trimless**

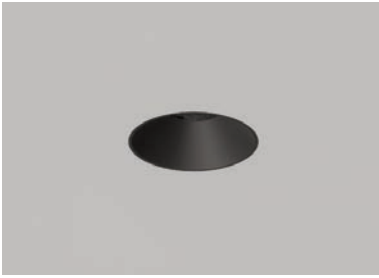

Blaze RT 7 **Z09684-7.36. | 1 | . 2 | . 3 |**

Power	7W
Beam angle	36°
Color temperature	3000K
Light efficiency	435lm
Color rendering index	CRI>90
Size	D53 H65mm cut-out: D60mm
IP	IP20
Material	aluminium, spray powder



Blaze RT 10 **Z09685-10.36. | 1 | . 2 | . 3 |**

Power	10W
Beam angle	36°
Color temperature	3000K
Light efficiency	635lm
Color rendering index	CRI>90
Size	D63 H70mm cut-out: D70mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40


Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request



— recessed trimless

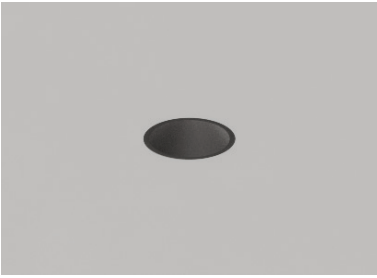

Evo RT

Z09858-7.36. |1|. |2|. |3|

Power	7W
Beam angle	36°
Color temperature	3000K
Light efficiency	490lm
Color rendering index	CRI>90
Size	D35 H82mm cut-out: D35mm
IP	IP20
Material	aluminium, spray powder



OPTIONS


Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request





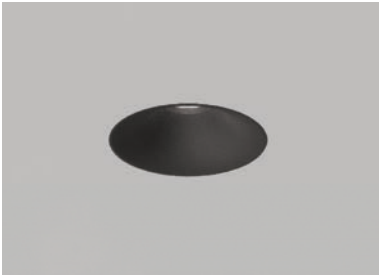

Vibe RT

Z09235-9.24. |1|. |2|. |3|

Power	9W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	630lm
Color rendering index	CRI>90
Size	D98 H81mm cut-out: D65mm
IP	IP44
Material	aluminium, spray powder

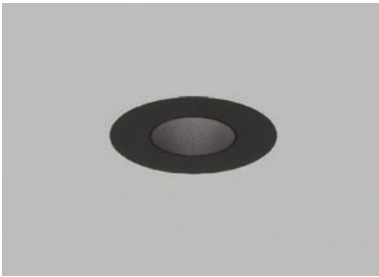

Navi RT

Z09237-9.24. |1|. |2|. |3|

Power	9W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	540lm
Color rendering index	CRI>90
Size	D98 H84mm cut-out: D65mm
IP	IP44
Material	aluminium, spray powder



OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D
3	*DIM-TRIAC	T

* On request






Flick RT

Z08722-10.24. |1|.2|.3|

Power	10W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	545lm
Color rendering index	CRI>90
Size	D52 H130mm cut-out: D55mm
IP	IP20
Material	aluminium, spray powder



with Honeycomb anti-glare louver


OPTIONS

Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH
2	White+Black ■	WB

Dim options		
3	Non-DIM	
3	*DIM	D

* On request

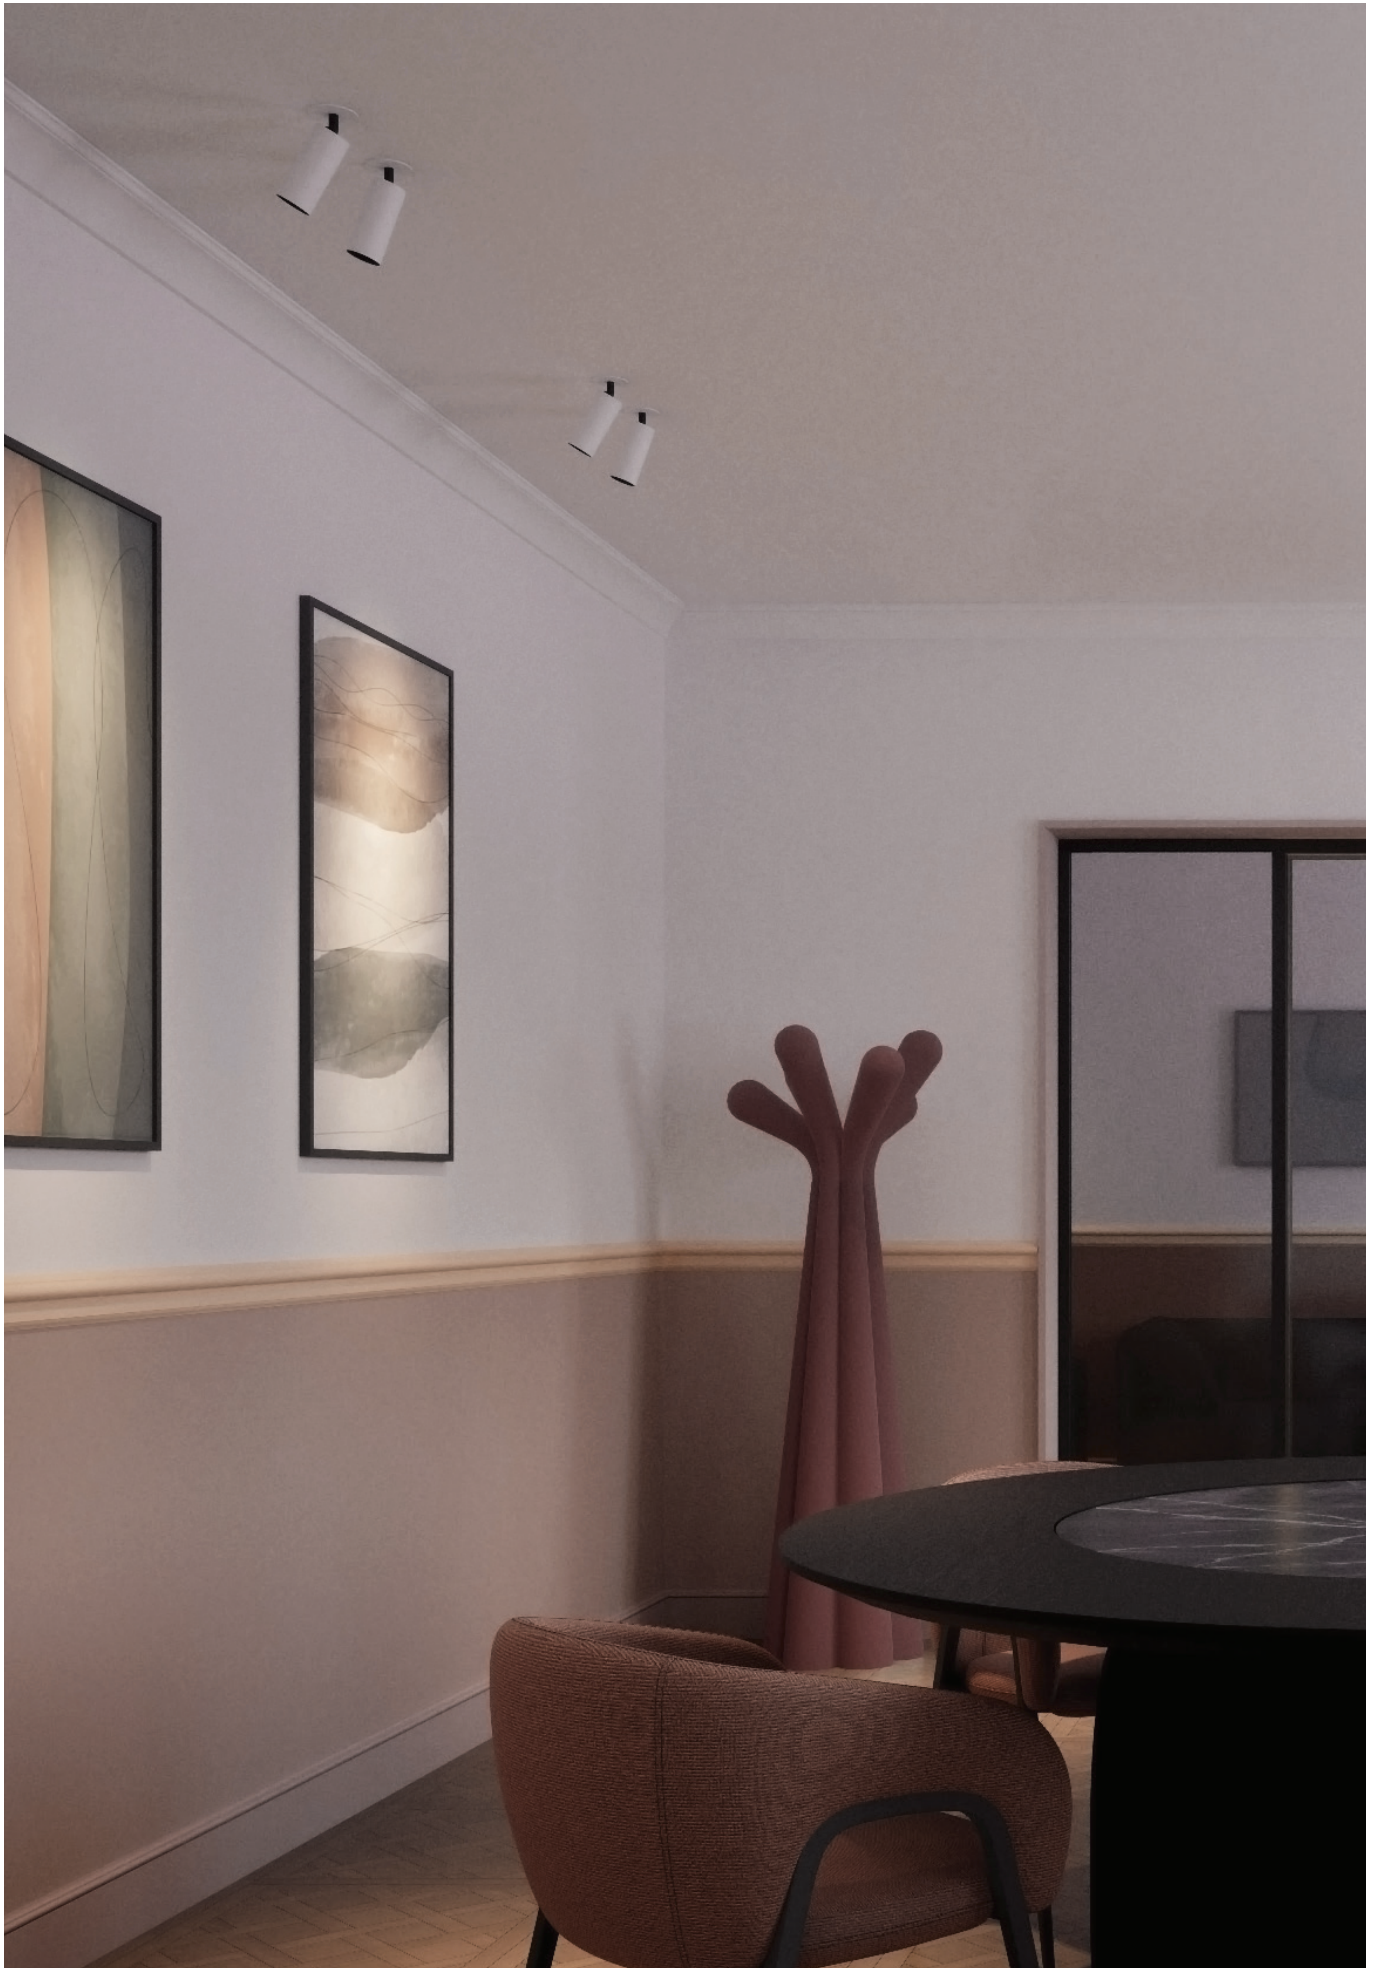



— **surface**






Fable

Z08754-12.38,[1](#),[2](#),[3](#)

Power	12W
Beam angle	38°
Color temperature	3000K
Light efficiency	860lm
Color rendering index	CRI>90
Size	D80 H110mm
IP	IP20
Material	aluminium, spray powder



Glid

Z08842-12.60,[1](#),[2](#),[3](#)

Power	12W
Beam angle	60°
Color temperature	3000K
Light efficiency	1020lm
Color rendering index	CRI>90
Size	D100 H125mm
IP	IP20
Material	aluminium, spray powder



OPTIONS


Colour temperature		
1	*2700K warm light	27
1	3000K home light	30
1	*4000K natur light	40

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D

* On request





Flick S

Z08723-10.24.**|1|.2|.3|**

Power	10W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	545lm
Color rendering index	CRI>90
Size	D52 H147mm
IP	IP20
Material	aluminium, spray powder



with Honeycomb anti-glare louver

OPTIONS


Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH
 2 	White+Black ■	WB

Dim options		
 3 	Non-DIM	
 3 	*DIM	D

* On request





Savy S

Z08614-10.38.[|1](#).[|2](#).[|3](#)

Power	10W
Beam angle	38°
Color temperature	3000K
Light efficiency	850lm
Color rendering index	CRI>90
Size	D100 H100mm
IP	IP20
Material	aluminium, spray powder



OPTIONS


Colour temperature		
 1	*2700K warm light	27
 1	3000K home light	30
 1	*4000K natur light	40

Colour		
 2	Black ■	BK
 2	White □	WH

Dim options		
 3	Non-DIM	D
 3	*DIM	D

* On request





Flux

Z08987-10.45,**|1|**,**|2|**,**|3|**

Power	5x2W
Beam angle	45°
Color temperature	3000K
Light efficiency	850lm
Color rendering index	CRI>90
Size	L138 W35 H65mm
IP	IP20
Material	aluminium, spray powder



OPTIONS


Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH

Dim options		
 3 	Non-DIM	
 3 	*DIM	D

* On request






Twine

Z08317-7.55.**|1|.2|.3|**

Power	7W
Beam angle	55°
Color temperature	3000K
Light efficiency	560lm
Color rendering index	CRI>90
Size	L75 W75 H90mm
IP	IP20
Material	aluminium, spray powder



Twine 2

Z08318-14.55.**|1|.2|.3|**

Power	2x7W
Beam angle	55°
Color temperature	3000K
Light efficiency	1120lm
Color rendering index	CRI>90
Size	L150 W75 H90mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour temperature		
 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour		
 2 	Black ■	BK
 2 	White □	WH
 2 	White+Black ■	WB

Dim options		
 3 	Non-DIM	
 3 	*DIM	D

* On request






— track



Blaze T

Z01220-8.36.**|1|.2|.3|**


Power	8W
Beam angle	36°
Color temperature	3000K
Light efficiency	850lm
Color rendering index	CRI>90
Size	D50 H134mm
IP	IP20
Material	aluminium, spray powder



Flick T

Z08724-10.24.**|1|.2|.3|**

Power	10W
Beam angle	24° + honeycomb
Color temperature	3000K
Light efficiency	545lm
Color rendering index	CRI>90
Size	D52 H100mm
IP	IP20
Material	aluminium, spray powder



with Honeycomb anti-glare louvre

TRACK

1 phase track 2000mm

ORDER CODE

Z11229.SR.200.2|

POWER FEEDER UNIT

Power feeder

ORDER CODE

Z11229.PF.2|

CONNECTOR

1 phase straight connector

ORDER CODE

Z11229.SC.2|

1 phase L corner connector

Z11229.LCC.2|

1 phase T corner connector

Z11229.TCC.2|

1 phase X corner connector

Z11229.XCC.2|

OPTIONS

Colour temperature

 1 	*2700K warm light	27
 1 	3000K home light	30
 1 	*4000K natur light	40

Colour

 2 	Black ■	BK
 2 	White □	WH
 2 	White+Black ■	WB

Dim options


 3 	Non-DIM	
 3 	*DIM	D

* On request






— linear



Nap 120

Z77120-36.PR.CCT. |1|.2|.3|

Power	36W
Beam angle	Prismatic
Color temperature	CCT (3000K/4000K/6000K)
Light efficiency	3200lm
Color rendering index	CRI>90
Size	L1200 W55 H70mm
IP	IP20
Material	aluminium, spray powder



Nap 120 U

Z77120-27+9.PR.CCT. |1|.2|.3|

Power	27W + 9W
Beam angle	Prismatic + PC diffuser
Color temperature	CCT (3000K/4000K/6000K)
Light efficiency	2400lm + 630lm
Color rendering index	CRI>90
Size	L1200 W55 H70mm
IP	IP20
Material	aluminium, spray powder




ACCESSORIES

Linkable connection accessories

ORDER CODE
Z77000-CP.



Wire suspension



Recessed installation



Wall mounted

OPTIONS

Mounting accessories

1	Wire suspension	SUS
1	Recessed installation	REC
1	Wall mounted	WAL

Colour


2	Black	BK
2	White	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request






Nap 150

Z77150-42.PR.CCT. |1|.2|.3|

Power	42W
Beam angle	Prismatic
Color temperature	CCT (3000K/4000K/6000K)
Light efficiency	3700lm
Color rendering index	CRI>90
Size	L1500 W55 H70mm
IP	IP20
Material	aluminium, spray powder



Nap 150 U

Z77150-32+10.PR.CCT. |1|.2|.3|

Power	32W + 10W
Beam angle	Prismatic + PC diffuser
Color temperature	CCT (3000K/4000K/6000K)
Light efficiency	2800lm + 700lm
Color rendering index	CRI>90
Size	L1500 W55 H70mm
IP	IP20
Material	aluminium, spray powder



ACCESSORIES


Linkable connection accessories

ORDER CODE


Z77000-CP.



Wire suspension



Recessed installation



Wall mounted

OPTIONS

Mounting accessories

1	Wire suspension	SUS
1	Recessed installation	REC
1	Wall mounted	WAL

Colour

2	Black	BK
2	White	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request





— **round**



86 |  Ø400

Lyro 40

Z99400-20.PR.CCT.|2|.3|

Power	20W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	1420-1780lm
Color rendering index	CRI>90
Size	D400 H86mm
IP	IP20
Material	aluminium, spray powder



86 |  Ø400


Lyro 40 Up

Z99400-20+C.PR.CCT.|2|.3|

Power	20W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	1420-1780lm
Color rendering index	CRI>90
Size	D400 H86mm
IP	IP20
Material	aluminium, spray powder



Rod suspension



Wire suspension

OPTIONS

Mounting accessories

1	Rod suspension 500mm	ROD
1	Wire suspension 800mm	SUS


Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request

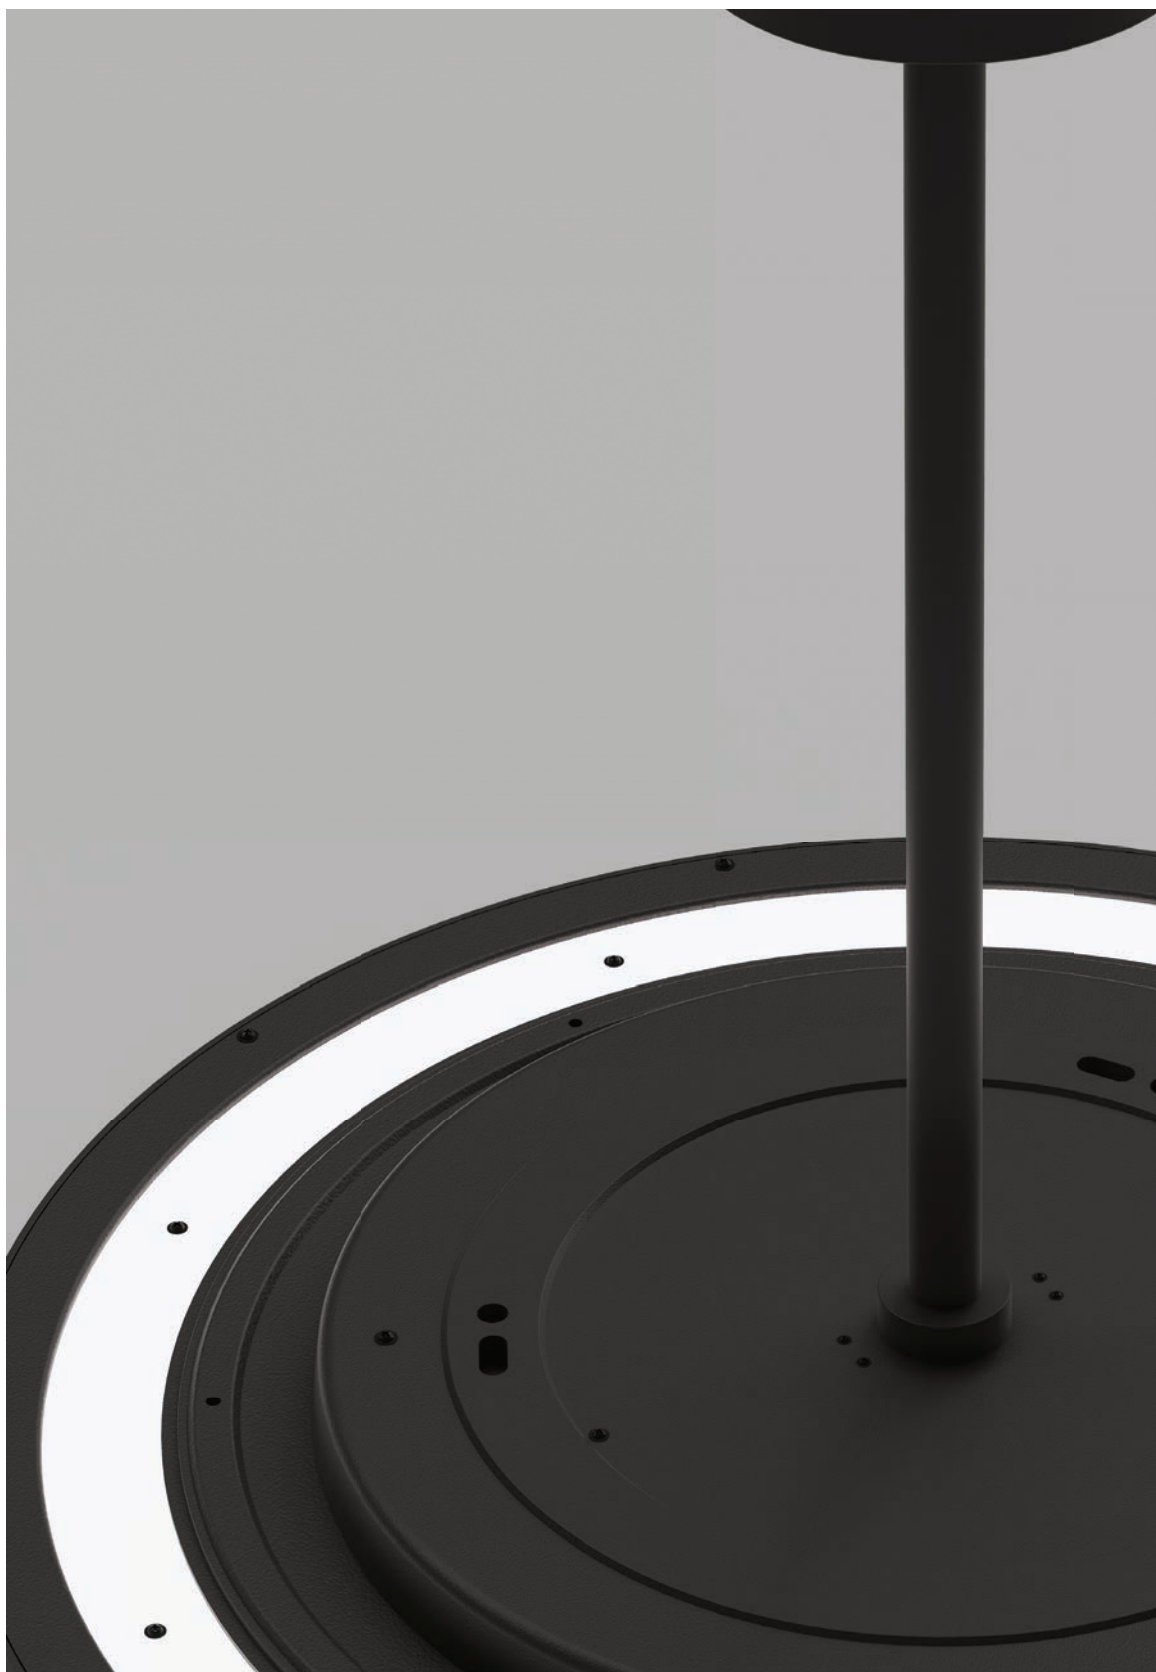



Lyro 60

Z99600-40.PR.CCT.|2|.3|

Power	40W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	3800-4580lm
Color rendering index	CRI>90
Size	D600 H86mm
IP	IP20
Material	aluminium, spray powder



Lyro 60 Up

Z99600-40+C.PR.CCT.|2|.3|

Power	40W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	3800-4580lm
Color rendering index	CRI>90
Size	D600 H86mm
IP	IP20
Material	aluminium, spray powder



Rod suspension



Wire suspension

OPTIONS

Mounting accessories

1	Rod suspension 500mm	ROD
1	Wire suspension 800mm	SUS

Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request





Lyro 80

Z99800-75.PR.CCT.|2|.3|

Power	75W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	7700-8580lm
Color rendering index	CRI>90
Size	D800 H86mm
IP	IP20
Material	aluminium, spray powder



Lyro 80 Up

Z99800-75+C.PR.CCT.|2|.3|

Power	75W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	7700-8580lm
Color rendering index	CRI>90
Size	D800 H86mm
IP	IP20
Material	aluminium, spray powder



Wire suspension

OPTIONS

Mounting accessories

1	Wire suspension 800mm	SUS
---	-----------------------	-----


Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request

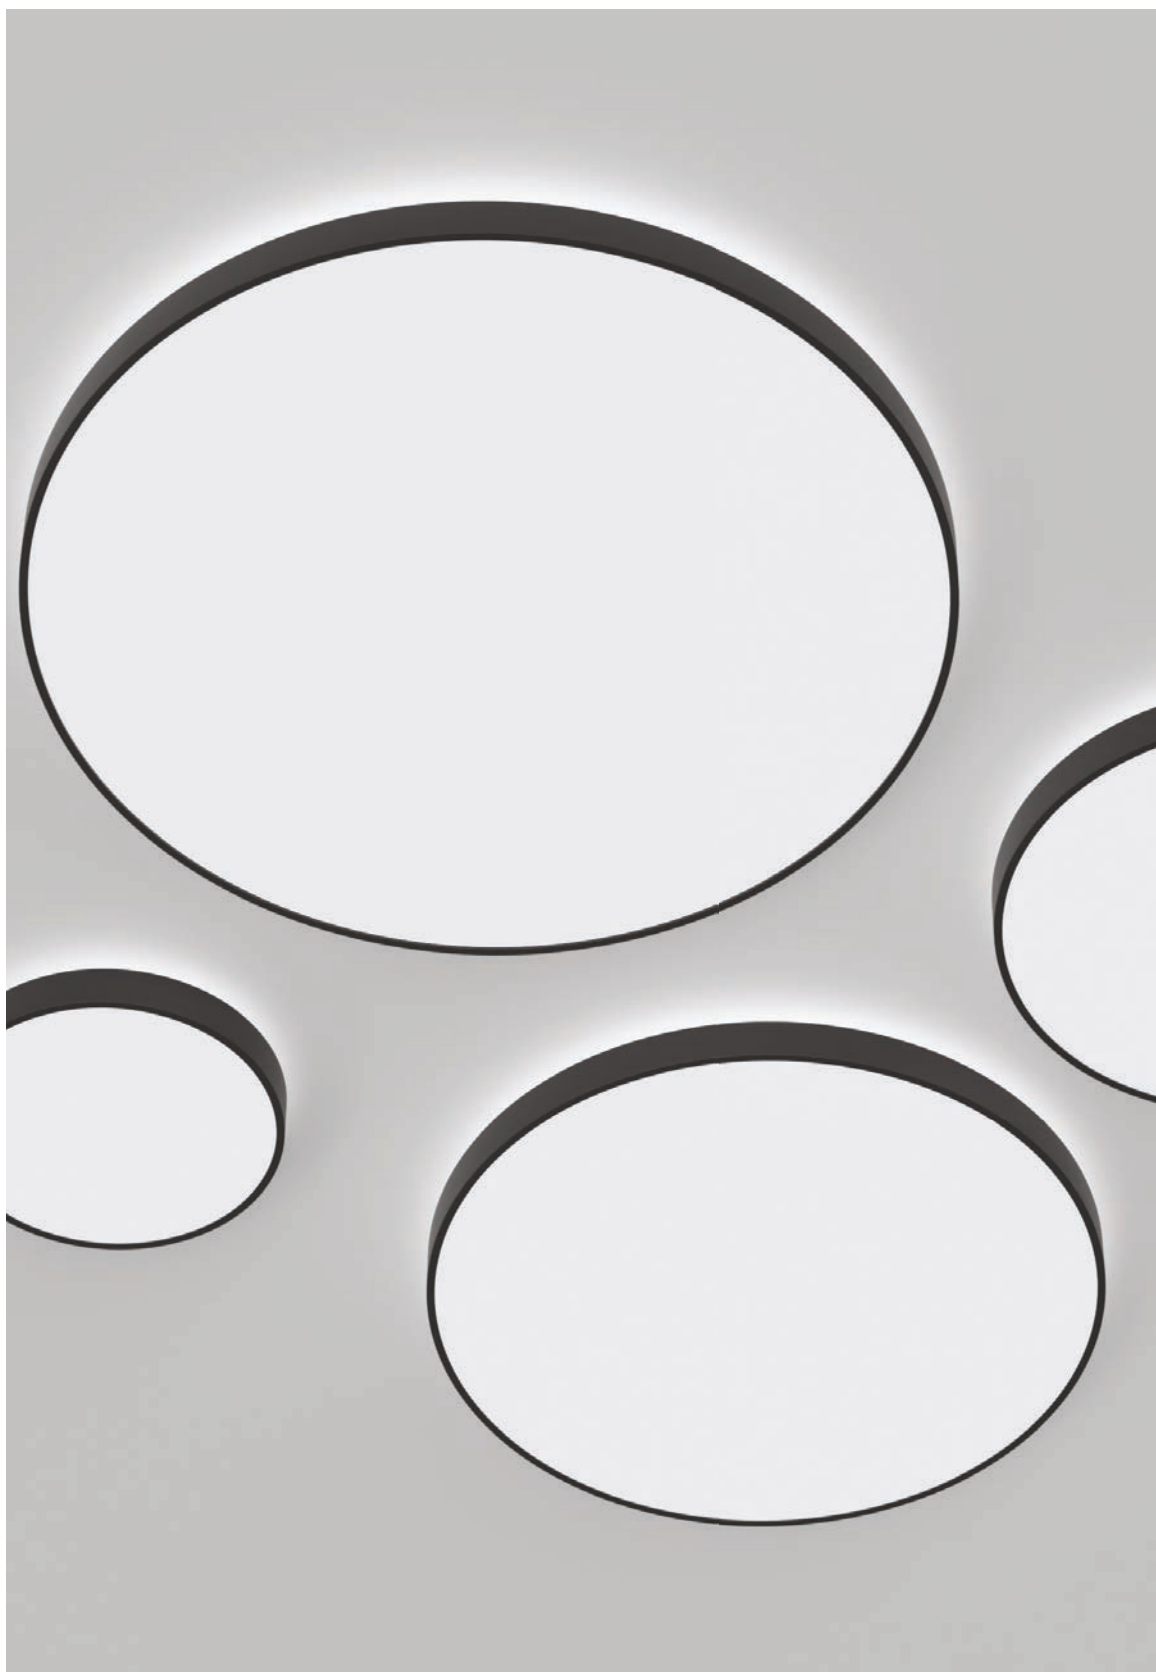



Lyro 100

Z9910X-100.PR.CCT.|2|.3|

Power	100W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	9480-10250lm
Color rendering index	CRI>90
Size	D1000 H86mm
IP	IP20
Material	aluminium, spray powder



Lyro 100 Up

Z9910X-100+C.PR.CCT.|2|.3|

Power	100W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	9480-10250lm
Color rendering index	CRI>90
Size	D1000 H86mm
IP	IP20
Material	aluminium, spray powder



Wire suspension

OPTIONS

Mounting accessories

1	Wire suspension 800mm	SUS
---	-----------------------	-----

Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request





86 | 
 Ø400

Nimbus 40 Z97400-20.PR.CCT.|2|.3|

Power	20W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	1420-1780lm
Color rendering index	CRI>90
Size	D400 H86mm
IP	IP20
Material	aluminium, spray powder



86 | 
 Ø400

Nimbus 40 Up Z97400-20+C.PR.CCT.|2|.3|

Power	20W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	1420-1780lm
Color rendering index	CRI>90
Size	D400 H86mm
IP	IP20
Material	aluminium, spray powder



Rod suspension



Wire suspension

OPTIONS

Mounting accessories

1	Rod suspension 500mm	ROD
1	Wire suspension 800mm	SUS

Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request



Nimbus 60 Z97600-40.PR.CCT.|2|.3|

Power	40W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	3800-4580lm
Color rendering index	CRI>90
Size	D600 H86mm
IP	IP20
Material	aluminium, spray powder




Nimbus 60 Up Z97600-40+C.PR.CCT.|2|.3|

Power	40W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	3800-4580lm
Color rendering index	CRI>90
Size	D600 H86mm
IP	IP20
Material	aluminium, spray powder



Rod suspension



Wire suspension

OPTIONS

Mounting accessories		
1	Rod suspension 500mm	ROD
1	Wire suspension 800mm	SUS

Colour		
2	Black ■	BK
2	White □	WH

Dim options		
3	Non-DIM	
3	*DIM	D

* On request



Nimbus 80 Z97800-75.PR.CCT. | 2 | . | 3 |

Power	75W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	7700-8580lm
Color rendering index	CRI>90
Size	D800 H86mm
IP	IP20
Material	aluminium, spray powder



Nimbus 80 Up Z97800-75+C.PR.CCT. | 2 | . | 3 |

Power	75W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	7700-8580lm
Color rendering index	CRI>90
Size	D800 H86mm
IP	IP20
Material	aluminium, spray powder



Wire suspension

OPTIONS

Mounting accessories

1	Wire suspension 800mm	SUS
---	-----------------------	-----

Colour

2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request




Nimbus 100 Z971000-100.PR.CCT.|2|.3|

Power	100W
Beam angle	90°
Color temperature	CCT (3000K/4000K)
Light efficiency	9480-10250lm
Color rendering index	CRI>90
Size	D1000 H86mm
IP	IP20
Material	aluminium, spray powder



Nimbus 100 Up Z971000-100+C.PR.CCT.|2|.3|

Power	100W
Beam angle	90° + uplight
Color temperature	CCT (3000K/4000K)
Light efficiency	9480-10250lm
Color rendering index	CRI>90
Size	D1000 H86mm
IP	IP20
Material	aluminium, spray powder



Wire suspension

OPTIONS

Mounting accessories

1	Wire suspension 800mm	SUS
---	-----------------------	-----

Colour


2	Black ■	BK
2	White □	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request

— circle

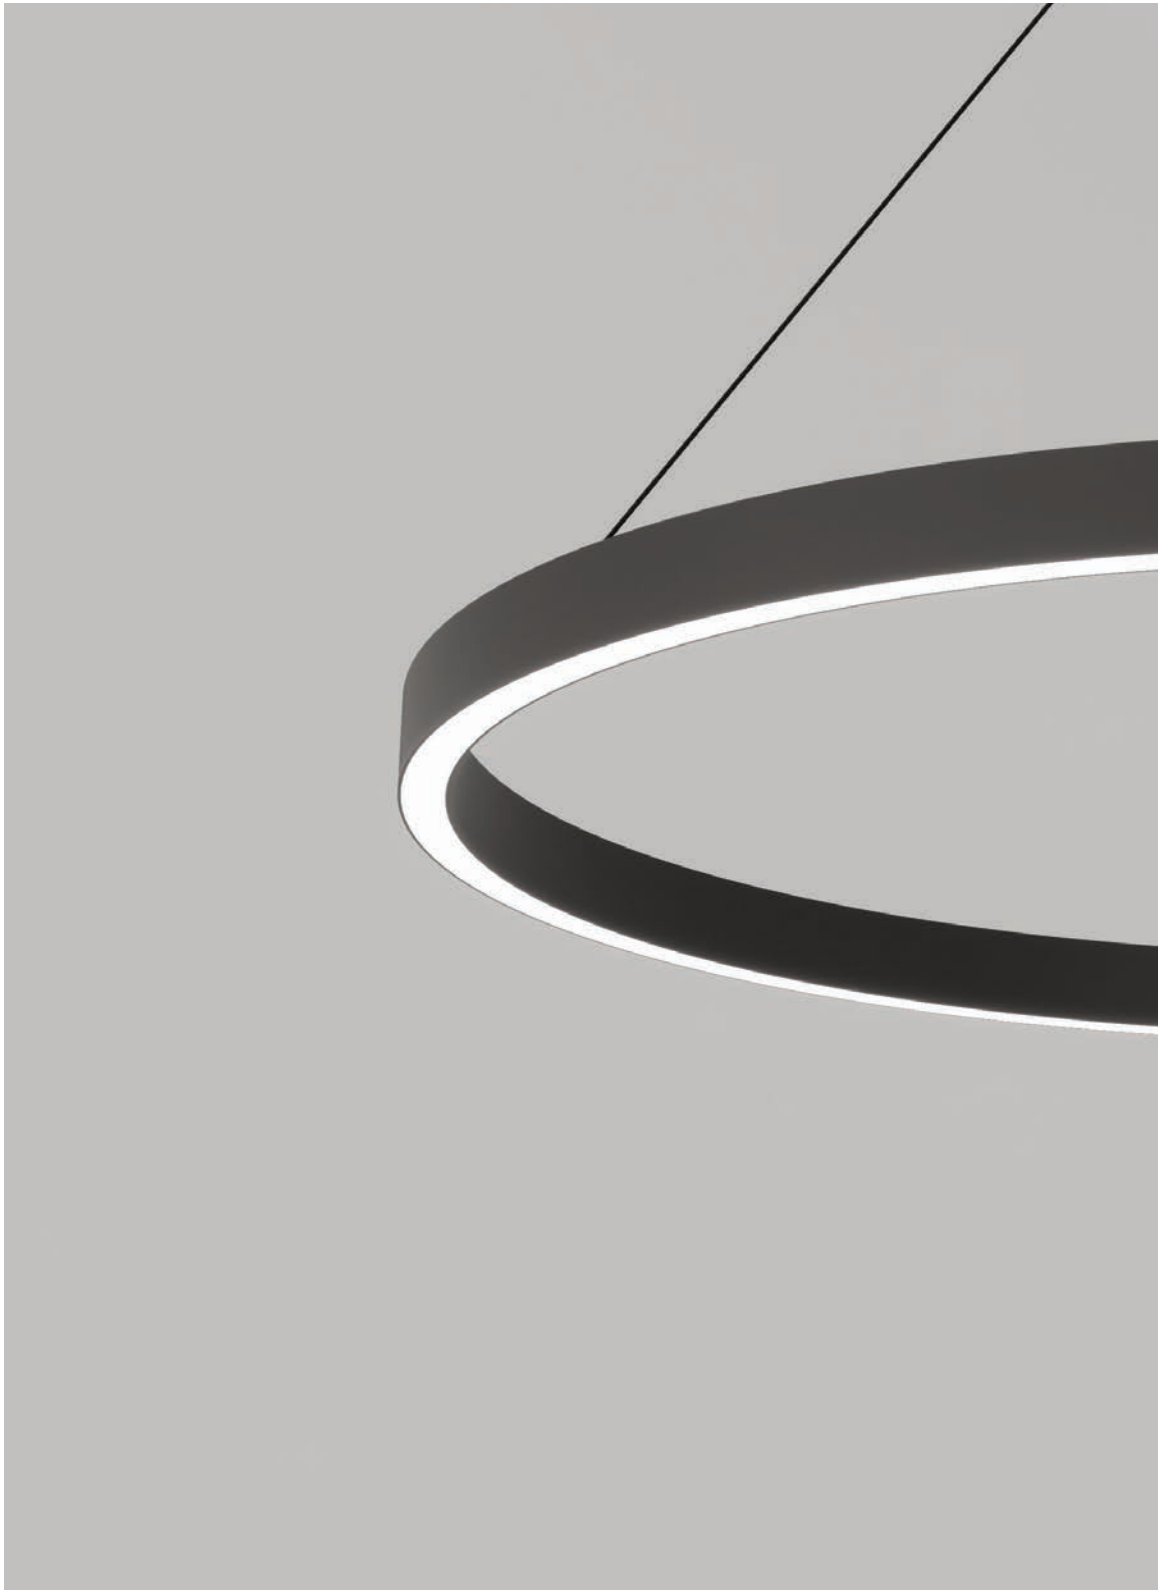



Orbi 60

Z88600-30.100.CCT.|2|.3|

Power	30W
Beam angle	100°
Color temperature	CCT (3000K/4000K)
Light efficiency	3000-3400lm
Color rendering index	CRI>90
Size	D600 H60mm
IP	IP20
Material	aluminium, spray powder



Orbi 60 Up

Z88600-36.100.CCT.|2|.3|

Power	36W
Beam angle	100° + 100°
Color temperature	CCT (3000K/4000K)
Light efficiency	3600-4100lm
Color rendering index	CRI>90
Size	D600 H60mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request



Orbi 80

Z88800-38.100.CCT.|2|.3|

Power	38W
Beam angle	100°
Color temperature	CCT (3000K/4000K)
Light efficiency	3800-4300lm
Color rendering index	CRI>90
Size	D800 H60mm
IP	IP20
Material	aluminium, spray powder



Orbi 80 Up

Z88800-46.100.CCT.|2|.3|

Power	46W
Beam angle	100° + 100°
Color temperature	CCT (3000K/4000K)
Light efficiency	4600-5200lm
Color rendering index	CRI>90
Size	D800 H60mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request



Orbi 100

Z881000-50.100.CCT.|2|.3|

Power	50W
Beam angle	100°
Color temperature	CCT (3000K/4000K)
Light efficiency	5000-5600lm
Color rendering index	CRI>90
Size	D1000 H60mm
IP	IP20
Material	aluminium, spray powder



Orbi 100 Up

Z881000-60.100.CCT.|2|.3|

Power	60W
Beam angle	100° + 100°
Color temperature	CCT (3000K/4000K)
Light efficiency	6000-6600lm
Color rendering index	CRI>90
Size	D1000 H60mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Dim options

3	Non-DIM	
3	*DIM	D

* On request



Orbi 120

Z8810X-64.100.CCT.|2|.3|

Power	64W
Beam angle	100°
Color temperature	CCT (3000K/4000K)
Light efficiency	6400-7200lm
Color rendering index	CRI>90
Size	D1200 H60mm
IP	IP20
Material	aluminium, spray powder



Orbi 120 Up

Z8810X-80.100.CCT.|2|.3|

Power	80W
Beam angle	100° + 100°
Color temperature	CCT (3000K/4000K)
Light efficiency	8400-9200lm
Color rendering index	CRI>90
Size	D1200 H60mm
IP	IP20
Material	aluminium, spray powder



OPTIONS

Colour

2	Black	■	BK
2	White	□	WH

Dim options


3	Non-DIM	
3	*DIM	D

* On request





— **led strips**

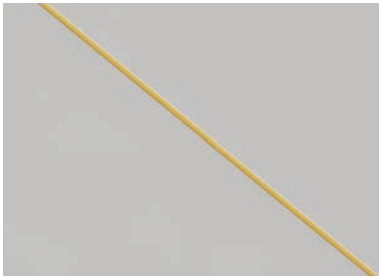

Strip 5

ZS2835-5.CO8.30.20


Power	5W/m
Beam angle	120°
Color temperature	3000K
Light efficiency	500lm/m
LEDs/m	320LED/m
Color rendering index	CRI>90
Voltage	24V DC
IP	IP20
Size	1000 5 2mm



Strip 10

ZS2835-10.120.30.20

Power	10W/m
Beam angle	120°
Color temperature	3000K
Light efficiency	1000lm/m
LEDs/m	120LED/m
Color rendering index	CRI>90
Voltage	24V DC
IP	IP20
Size	1000 12 5,5mm

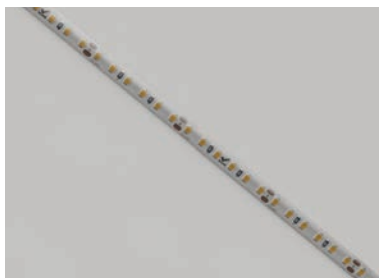

Strip IP

ZS2835-10.120.30.67

Power	10W/m
Beam angle	120°
Color temperature	3000K
Light efficiency	1000lm/m
LEDs/m	120LED/m
Color rendering index	CRI>90
Voltage	24V DC
IP	IP67
Size	1000 12 5,5mm







— **drivers**



DR60

Z24-DR.60.L.EXT.D


Power	60W
Output	24V
Input	AC220-240V/50Hz
Dimming	DALI/DALI2
Size	350x30x18mm



DR100

Z24-DR.100.L.EXT.D

Power	100W
Output	24V
Input	AC220-240V/50Hz
Dimming	DALI/DALI2
Size	350x30x18mm

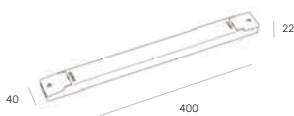

DR250

Z24-DR.250L.EXT.D

Power	250W
Output	24V
Input	AC220-240V/50Hz
Dimming	DALI/DALI2
Size	400x40x22mm





DR100

Z48-DR.100.L.EXT

Power	100W
Output	48V
Input	AC220-240V/50Hz
Dimming	On/off
Size	350x30x18mm



DR150

Z48-DR.150.L.EXT

Power	150W
Output	48V
Input	AC220-240V/50Hz
Dimming	On/off
Size	350x30x18mm





DR250

Z48-DR.250L.EXT

Power	250W
Output	48V
Input	AC220-240V/50Hz
Dimming	On/off
Size	400x40x22mm





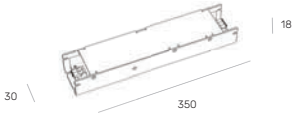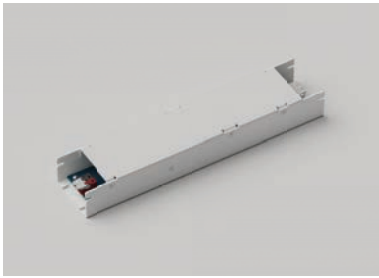

DR150T

Z48-DR.150W.EXT.T


Power	150W
Output	48V
Input	AC220-240V/50Hz
Dimming	TRIAC
Size	350x30x18mm

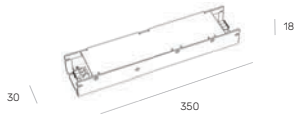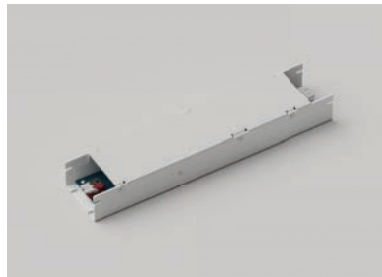

DR300T

Z48-DR.300W.EXT.T

Power	300W
Output	48V
Input	AC220-240V/50Hz
Dimming	TRIAC
Size	350x30x18mm

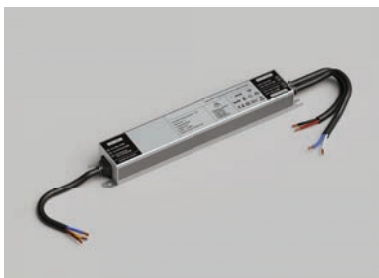

DR150

Z24-DR.150W.EXT.T

Power	150W
Output	24V
Input	AC220-240V/50Hz
Dimming	TRIAC, 1-10V, PWM
Size	255x48x32mm



